


# Delock Converter SATA / USB 3.1 Type-B female > M.2 / mSATA Slot

**M.2**

## Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format or a mSATA SSD in half size or full size format. If both slots are occupied, only the M.2 SSD can be used. The converter can be installed into the system through a SATA or USB interface.

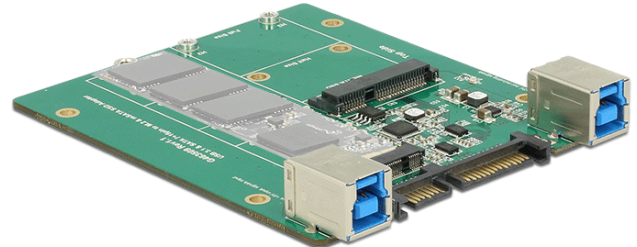

## Specification

- Connector:
  - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-B female
  - 1 x USB 3.0 Type-B female (optional power supply) >
  - 1 x 67 pin M.2 key B slot
  - 1 x mSATA slot (half size / full size)
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- LED indicator
- Maximum current for M.2 or mSATA module: 3 A
- Dimensions (LxWxH): ca. 100 x 85 x 15 mm

## System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- A free SATA interface or
- A free USB interface

## Package content

- Converter
- Screw for M.2 module and mSATA module
- User manual

## Item No. 62732



EAN: 4043619627325

Country of origin: Taiwan, Republic of China

Package: Box



## Images

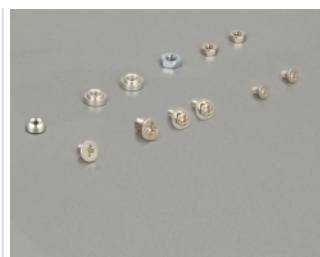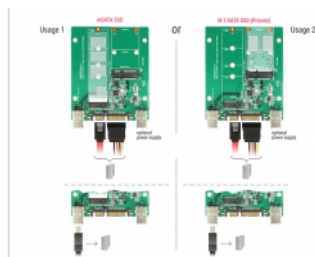

General	
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Connection 1:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-B female
Connection 2:	1 x USB 3.0 Type-B female (optional power supply)
Connection 3:	1 x 67 pin M.2 key B slot
Connection 4:	1 x mSATA slot (half size / full size)
Physical characteristics	
Length:	100 mm
Width:	85 mm
Height:	15 mm