


Delock 2.5" Converter USB 3.1 Micro-B female > M.2 / mSATA with enclosure

M.2

Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format or an mSATA SSD in half size or full size format. If both slots are occupied, only the M.2 SSD can be used. The converter can be installed into the system through the USB interface.

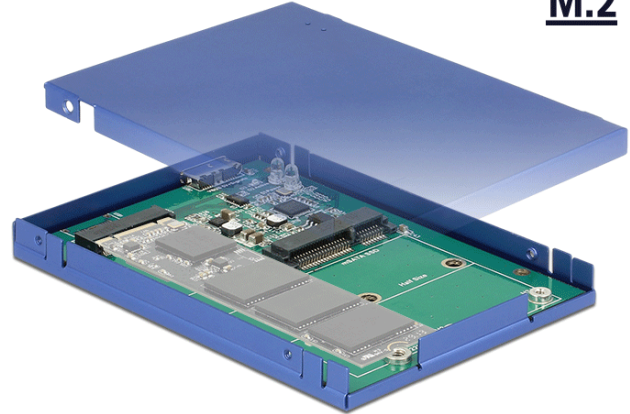

Specification

- Connector:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type Micro-B female >
 - 1 x 67 pin M.2 key B slot
 - 1 x mSATA slot (half size / full size)
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- LED indicator
- Maximum current for M.2 module: 3 A
- Short circuit protection, over heating protection
- ESD protection up to 2 Kv
- Dimensions (LxWxH): ca. 100 x 70 x 9 mm

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- A free USB interface

Package content

- Converter
- 2.5" enclosure
- Fixing screws for M.2 module, mSATA module and enclosure
- USB cable, length ca. 35 cm
- Cooling pad for M.2 and mSATA module
- User manual

Item No. 62731


EAN: 4043619627318

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images

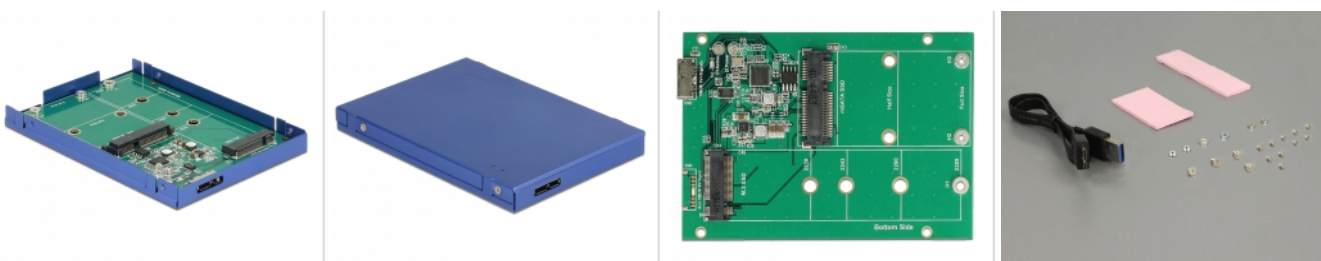

General

Form factor:	2.5"
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported

Interface

Connection 1:	1 x USB 3.1 Gen 2 Type Micro-B female
Connection 2:	1 x 67 pin M.2 key B slot
Connection 3:	1 x mSATA slot (half size / full size)

Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	9 mm