


Delock PCI Express Card > 1 x Serial + 1 x Parallel

Description

The Delock PCI Express card expands a PC by one external serial port and one external parallel port. Different devices such as scanner, printer, mouse etc. can be connected to this card.

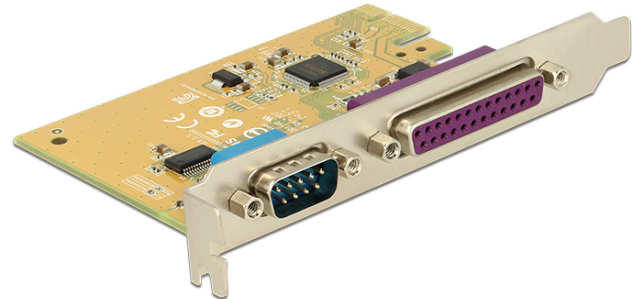

Specification

- Connector:
 - external:
 - 1 x serial RS-232 DB9 male
 - 1 x Parallel DB25 female
 - internal:
 - 1 x PCI Express x1, V2.0
- Chipset: SUN2410
- **Serial specification:**
 - Data transfer rate up to 115.2 Kb/s
 - FIFO: 128 byte
 - Compatible with 16C950 UART
 - Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
 - ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard
- **Parallel specification:**
 - Data transfer rate up to 1.8 MB/s
 - FIFO: 16 byte
 - SPP, EPP, ECP, BPP compatible to IEEE 1284

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Driver CD
- User manual

Item No. 89446



EAN: 4043619894468

Country of origin: China

Package: Retail Box



Images



General

Supported operating system:

- Windows 7 32-bit
- Windows 7 64-bit
- Windows 8 32-bit
- Windows 8 64-bit
- Windows 8.1 32-bit
- Windows 8.1 64-bit
- Windows 10 32-bit
- Windows 10 64-bit

Interface

External:

- 1 x serial RS-232 DB9 male
- 1 x Parallel DB25 female

Internal:

- 1 x PCI Express x1, V2.0

Technical characteristics

Data transfer rate:

- Parallel**
1,8 MB/s
- Seriell**
115.2 Kb/s

FIFO:

- Parallel**
16 byte
- Seriell**
128 byte

UART:

- Seriell**
16C950

Physical characteristics

Slot bracket: standard