

## HDMI Over IP Extender Kit - 1080p



*Actual product may vary from photos*

## User Manual

**SKU#: ST12MHDLAN2K & ST12MHDLAN2R**

For the latest information and specifications visit  
[www.startech.com/ST12MHDLAN2K](http://www.startech.com/ST12MHDLAN2K)  
[www.startech.com/ST12MHDLAN2R](http://www.startech.com/ST12MHDLAN2R)

Manual Revision: 10/22/2018

# Compliance Statements

## FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

## Industry Canada Statement

This Class A digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe [A] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (A)/NMB-3(A)

## **Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols**

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

### **For the State of California**

** WARNING: Cancer and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# Safety Statements

## Safety Measures

- Wiring terminations should not be made with the product and/or electric lines under power.
- Product installation and/or mounting should be completed by a certified professional as per the local safety and building code guidelines.
- Cables (including power and charging cables) should be placed and routed to avoid creating electric, tripping or safety hazards.

## Mesures de sécurité

- Les terminaisons de câblage ne doivent pas être effectuées lorsque le produit et/ou les câbles électriques sont sous tension.
- L'installation et/ou le montage du produit doit être réalisé par un professionnel certifié et dans le respect des normes locales et du code de construction local.
- Les câbles (y compris les câbles d'alimentation et de chargement) doivent être placés et acheminés de façon à éviter tout risque électrique, de chute ou de sécurité

## 安全対策

- 電源が入っている状態の製品または電線の終端処理を行わないでください。
- 製品の設置やマウントは、使用地域の安全ガイドラインおよび建築基準に従い、有資格の専門業者が行うようにしてください。
- ケーブル（電源ケーブルと充電ケーブルを含む）は、適切な配置と引き回しを行い、電気障害やつづきの危険性など、安全上のリスクを回避するようにしてください。

## Misure di sicurezza

- I terminali dei fili elettrici non devono essere realizzate con il prodotto e/o le linee elettriche sotto tensione.
- L'installazione e/o il montaggio dei prodotti devono essere eseguiti da un tecnico professionale certificato che conosca le linee guida locali sulle norme edilizie e sulla sicurezza.
- I cavi (inclusi i cavi di alimentazione e di ricarica) devono essere posizionati e stesi in modo da evitare pericoli di inciampo, rischi di scosse elettriche o pericoli per la sicurezza.

## Säkerhetsåtgärder

- Montering av kabelavslutningar får inte göras när produkten och/eller elledningarna är strömförda.
- Installation och/eller montering får endast göras av behöriga yrkespersoner och enligt gällande lokala förordningar för säkerhet och byggnormer.
- Kablar (inklusive elkablar och laddningskablar) ska dras och placeras på så sätt att risk för snubblingsolyckor och andra olyckor kan undvikas.

# Table of Contents

<b>Compliance Statements .....</b>	<b>1</b>
<b>Safety Statements .....</b>	<b>3</b>
<b>Product Diagram .....</b>	<b>6</b>
Transmitter Front.....	6
Transmitter Rear .....	6
Receiver Front.....	7
Receiver Rear .....	7
<b>Product Information .....</b>	<b>8</b>
Package Contents (ST12MHDLAN2K) .....	8
Package Contents (ST12MHDLAN2R) .....	8
Requirements.....	9
<b>Installation .....</b>	<b>10</b>
<b>Optional Installation.....</b>	<b>11</b>
Using a Separate 3.5 mm Audio Source.....	11
Connect the Devices to a Gigabit LAN Network.....	11
Using the RJ-11 to RS-232 Adapters.....	12
Installing the IR Receiver and IR Blaster .....	13
Mounting the Extender.....	14
Installing the Feet .....	15
<b>Configuration.....</b>	<b>16</b>
Rotary DIP Switch.....	16
Serial 1 Control Port .....	16

---

Audio Embed Switch .....	16
Function Buttons.....	17
Rebooting the System.....	18
StarTech.com Wall Control App .....	19
General Navigation and Operation .....	19


## **Software Installation .....20**

Connecting Transmitters and Receivers to the Software .....	21
Adjusting the IP Address and Subnet Masks .....	22
Switching Your Remote Displays Between Video Sources .....	24
Configuring Your Remote Displays for a Video Wall Application .....	26
Adjusting Video Tear .....	33


## Product Diagram

Actual product may vary from photos

### Transmitter Front

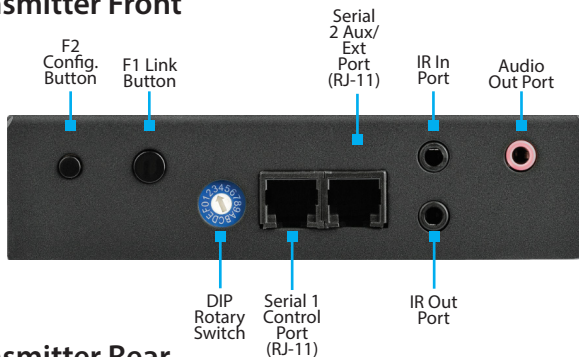


### Transmitter Rear

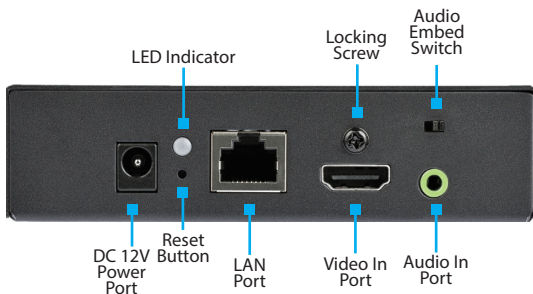


To view manuals, videos, drivers, downloads, technical drawings, and more visit [www.startech.com/support](http://www.startech.com/support)

## Receiver Front

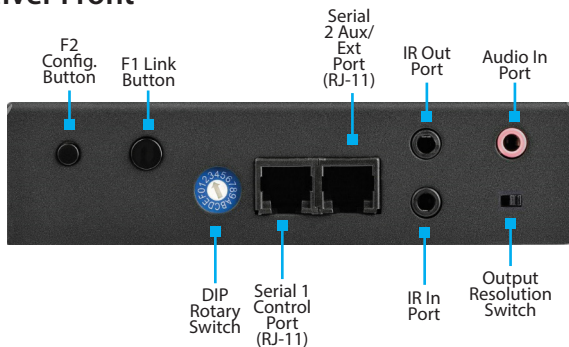

## Receiver Rear

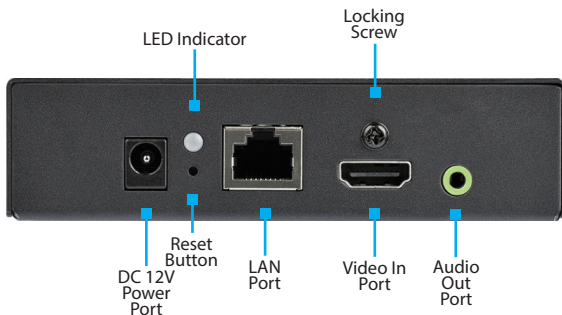



## Product Information

### Package Contents (ST12MHDLAN2K)

- HDMI Transmitter x 1
- HDMI Receiver x 1
- Universal Power Adapters (NA, EU, UK, ANZ) x 2
- Hardware Kit x 1
  - Mounting Brackets x 2
  - Mounting Screws x 8
  - HDMI Locking Screws x 2
  - Plastic Screwdriver x 1
- CAT5 Cable x 1
- RJ-11 to RS-232 Adapters x 2
- RJ-11 Cables x 2
- IR Blaster x 1
- IR Receiver x 1
- Foot Pads x 8
- User Manual x 1

### Package Contents (ST12MHDLAN2R)

- HDMI Receiver x 1
- Universal Power Adapters (NA, EU, UK, ANZ) x 1
- Hardware Kit x 1
  - Mounting Brackets x 2
  - Mounting Screws x 8
  - HDMI Locking Screws x 1

- Plastic Screwdriver x 1
- CAT5 Cable x 1
- RJ-11 to RS-232 Adapters x 1
- RJ-11 Cables x 1
- IR Blaster x 1
- IR Receiver x 1
- Foot Pads x 4
- User Manual x 1

## Requirements

For the latest requirements, please visit [www.startech.com/ST12MHDLAN2K](http://www.startech.com/ST12MHDLAN2K) or [www.startech.com/ST12MHDLAN2R](http://www.startech.com/ST12MHDLAN2R).

### Installation:

- Phillips Head Screwdriver
- Writing Utensil
- Level

### Display:

- HDMI Displays x 1 (per HDMI Receiver)

### Devices:

- HDMI Video Source x 1 (per HDMI Transmitter)

## Installation

1. Set up an **HDMI Video Source Device** (e.g. computer) and an **HDMI Display Device** in the desired location.
2. Position the **HDMI Transmitter** near the **HDMI Video Source Device** you set up in step 1.
3. Connect an **HDMI Cable** from the **HDMI Video Source Device** to the **Video In Port** on the back of the **HDMI Transmitter**.

**Note:** *If you are using a Locking HDMI Cable, use a Phillips Head Screwdriver to remove the screw above the Video Port. Connect an HDMI Cable to the Video In Port on the back of the HDMI Transmitter, and re-insert the Locking Screw into the Locking Screw Hole. Using the Phillips Head Screwdriver, tighten the Locking Screw. Be careful not to over-tighten.*

4. Position the **HDMI Receiver** near the **HDMI Video Display Device** you set up in step 1.
5. Connect an **HDMI Cable** from the **Video Out Port** on the back of the **HDMI Receiver** to the **HDMI Video Display Device**.

**Notes:** *To connect additional HDMI Receivers (sold separately), repeat step 5.*

6. Connect a **CAT5e/CAT6 Cable** to the **LAN Port** on the back of the **HDMI Transmitter**.
7. Connect the other end of the **CAT5e/CAT6 Cable** to the **LAN Port** on the back of the **HDMI Receiver**.  
***Note:** The cabling should not go through any networking equipment (e.g. router, switch, etc.).*
8. Connect the **Universal Power Adapter** to the **DC 12V Power Port** on both the **HDMI Transmitter** and **HDMI Receiver** and to an **AC Electrical Outlet**.

## Optional Installation

### Using a Separate 3.5 mm Audio Source

#### **Audio In Port (Transmitter)/Audio Out Port (Receiver):**

If you intend to add a separate 3.5 mm audio source (Microphone) that can be embedded into the HDMI signal and selected as the audio source:

1. Connect a **3.5 mm Audio Cable** to the **Audio In Port** on the **HDMI Transmitter** and the other end to the **Audio Source Device**.
2. Connect a **3.5 mm Audio Cable** to the **Audio Out Port** on the **HDMI Receiver** and the other end to an **Output Device**.

## Audio Out Port (Transmitter)/Audio In Port (Receiver):

If you intend to transmit an audio signal from the **HDMI Receiver** to the **HDMI Transmitter**.

1. Connect a **3.5 mm Audio Cable** to the **Audio In Port** on the **HDMI Receiver** and connect the other end of the cable to the **Audio Device**.
2. Connect a **3.5 mm Audio Cable** to the **Audio Out Port** on the **HDMI Transmitter** and connect the other end of the cable to the **Output Device**.

## Connect the Devices to a Gigabit LAN Network

The **HDMI Transmitter** and **HDMI Receiver** can be used in a video wall or point to multi-point or point-to-point configuration over a Gigabit LAN.

1. Connect a **CAT5e/CAT6 Cable** to the **LAN Port** on the **HDMI Transmitter**.
2. Connect the other end of the **CAT5e/CAT6 Cable** to a Gigabit LAN hub, router or switch.
3. Connect a **CAT5e/CAT6 Cable** to the **LAN Port** on the **HDMI Receiver**.
4. Connect the other end of the **CAT5e/CAT6 Cable** to a Gigabit LAN hub, router or switch.

**Note:** *Your router must support IGMP snooping. Please refer to your network switch or router documentation to ensure IGMP snooping is supported and enabled.*

5. Verify that the image from your **Video Source** appears on the **Display Devices** attached to the **HDMI Receiver(s)**.

## Using the RJ-11 to RS-232 Adapters

The **RJ-11 to RS-232 Adapter** can be used to connect a **Serial Device** to either the **HDMI Transmitter** or **HDMI Receiver**.

1. Connect an **RJ-11 Cable** to the **Serial 2 Aux/Ext Port (RJ-11)** on either the **HDMI Transmitter** or **HDMI Receiver**.
2. Connect the other end of the **RJ-11 Cable** to the **RJ-11 Port** on a **Adapter**.
3. Plug the **RS-232 Connector** on the **Adapter** into an **RS-232 Port** on the **Serial Device**.

**Note:** *When connecting the RS-232 connector on the Adapter to the Serial Device you may need to use an additional serial cable or adapter.*

## Installing the IR Receiver and IR Blaster

The **IR Receiver** and **IR Blaster** can be connected to either the **HDMI Transmitter** or **HDMI Receiver**.

### HDMI Transmitter:

If the device receiving the IR signal is at the **HDMI Receiver** side:

1. Connect the **IR Receiver** to the **IR In Port** on the front of the **HDMI Transmitter**.
2. Position the **IR Receiver** where you'll point your **IR Remote Control**.

If the device receiving the IR signal is at the **HDMI Transmitter** side:

1. Connect the **IR Blaster** to the **IR Out Port** on the front of the **HDMI Transmitter**.
2. Position the **IR Blaster** directly in front of the **HDMI Video Source's IR Sensor** (if you're unsure, check the manual of your **HDMI Video Source** to determine the **IR Sensor** location).

### **HDMI Receiver:**

If the device receiving the IR signal is at the **HDMI Receiver** side:

1. Connect the **IR Blaster** to the **IR Out Port** on the **HDMI Receiver**.
2. Position the **IR Blaster** directly in front of the device's **IR Sensor** (if you're unsure, check the manual of your **Video Source** to determine the **IR Sensor** location).

If the device receiving the IR signal is at the **HDMI Transmitter** side:

1. Connect the **IR Receiver** to the **IR In Port** on the **HDMI Receiver**.
2. Position the **IR Receiver** where you'll point your **IR Remote Control**.

## Mounting the Extender

**Notes:** StarTech.com is not responsible for any damages related to the installation of this product.

*Prior to mounting, please test the product's port compatibility with all devices intended for use with this product.*

1. Align the **Mounting Bracket** with the two **Mounting Screw Holes** on the side of the **HDMI Transmitter** and/or **HDMI Receiver** (two per side).

**Note:** Make sure that the large circular opening on the Mounting Holes is at the bottom when the Mounting Brackets are installed. This will ensure that you can properly mount the bracket on the wall.

2. Insert the **Mounting Screws** through the **Mounting Bracket** and into the **Mounting Screw Holes** on the side of the **HDMI Transmitter** and/or **HDMI Receiver**.
3. Using a **Phillips Head Screwdriver** tighten the four **Mounting Screws**, be careful not to over-tighten.
4. Before mounting the **HDMI Transmitter** and/or **HDMI Receiver** make sure that the surface you are mounting to is strong enough to support the weight of the **HDMI Transmitter** and **HDMI Receiver**. It is recommended that you mount the **HDMI Transmitter** and/or **HDMI Receiver** onto a wall stud to provide the correct support.
5. Measure the distance between the **Mounting Screw Holes** on the **Mounting Brackets**.



6. Using a **Level** and a **Writing Utensil**, mark the distance measured between the two **Mounting Screw Holes** on the mounting surface.
7. Using a **Phillips Head Screwdriver**, screw the two **Mounting Screws** into the surface, using the **Mounting Screw Hole** locations marked in step 6 as a guide. Make sure that you leave space between the head of the screw and the wall.
8. Align the large circular holes on the **Mounting Bracket** with the **Mounting Screws**.
9. Slide the **HDMI Transmitter** and/or **HDMI Receiver** down, to lock the **Mounting Brackets** in place.

## Installing the Feet

1. Remove the adhesive backing from the foot pads.
2. Align each of the foot pads with the four impressions on the bottom of the HDMI Transmitter and HDMI Receiver.
3. While applying pressure, affix the feet to the bottom of the HDMI Transmitter and HDMI Receiver.

## Configuration

### Rotary DIP Switch

The **Rotary DIP Switch** on the **HDMI Transmitter** and connected **HDMI Receiver(s)** must be set to the same position/channel for the devices to communicate.

- Use the flat end of the **Plastic Screwdriver** (included) to adjust the **Rotary DIP Switch's** position.

## Serial 1 Control Port

The **Serial 1 Control Port** is currently not support by StarTech.com. It is recommended that the StarTech.com Wall Control app is used to configure the **HDMI Transmitter** and **HDMI Receiver(s)**.

## Output Resolution Switch

The **Output Resolution Switch** is located on the **HDMI Receiver** and has two settings:

### **Native:**

Sets the video output to a max of 1080p @ 60Hz.

### **Scaling:**

Set the video output to 720p @ 60Hz

## Audio Embed Switch

The **Audio Embed Switch** is located on the **HDMI Transmitter** and has two settings:

## Embedded:

Embeds external audio from the Audio In Port into the HDMI signal.

## HDMI:

Uses the audio from the HDMI signal.

## Function Buttons

The **F1 (Link)** and **F2 (Config.)** function buttons allow you to perform the following functions:

### HDMI Transmitter/HDMI Receiver F1 Button

#### Link/Unlink Video:

- Press the **F1 Button** once.

#### Factory Reset:

1. Power off the **HDMI Transmitter** or **HDMI Receiver** (unplug the **Universal Power Adapter** from the **HDMI Transmitter** or **HDMI Receiver**).
2. Press and hold the **F1 Button**.
3. Power on the **HDMI Transmitter** or **HDMI Receiver** (plug the **Universal Power Adapter** back into the **HDMI Transmitter** or **HDMI Receiver**).
4. Release the **F1 Button** after 17 seconds (the **Power/Link LED** will flash green and blue).
5. For a second time power cycle the **HDMI Transmitter** or **HDMI Receiver**.

## HDMI Transmitter/HDMI Receiver F2 Button

### Graphic/Video Mode:

- Press and hold the **F2 Button** for 1 second.

### Anti-Dither Adjustment Mode:

- Press and hold the **F2 Button** for 3 seconds.

### EDID Copy (HDMI Receiver only):

1. Power off the **HDMI Transmitter** or **HDMI Receiver** (unplug the **Universal Power Adapter** from the **HDMI Transmitter** or **HDMI Receiver**).
2. Press and hold the **F2 Button**.
3. Power on the **HDMI Transmitter** or **HDMI Receiver** (plug the **Universal Power Adapter** back into the **HDMI Transmitter** or **HDMI Receiver**).
4. Release the **F2 Button** after 12 seconds (the **Network Status LED** will flash yellow).

## Rebooting the System

1. With the **HDMI Transmitter** or **HDMI Receiver** powered on, Insert a pointed-tip object (e.g. pin) into the recessed Reset Button.
2. Hold the recessed **Reset Button** until the **HDMI Transmitter** or **HDMI Receiver** reboots.

## StarTech.com Wall Control App

### General Navigation and Operation

You can access the StarTech.com Wall Control app software menu from any screen by clicking the **Menu** icon in the top right-hand corner of the screen.

From the menu you can access each of the options below.

**Help:** Lists information and walkthroughs regarding operation of the application.

**Device Search Mode:** Enables you to define your preferred method of identifying the Transmitter and Receiver on the network. You can choose between two methods of identification, Multicast DNS or Target IP.

**Multicast DNS:** is the default setting and will search automatically for devices over the network.

**Target IP:** is an advanced setting that enables you to specify an IP address that the remote devices are set to, in order for the software to identify them. This is a good option if you'd like multiple setups with different displays and transmitters on different subnets and IP address ranges.

**Clear All Settings:** Restores your software to default settings.

**Demo Mode:** Creates a virtual environment with multiple Transmitters and Receivers that enables you to configure a virtual setup without physically connecting the Transmitters or Receivers, to test the functionality.

## Software Installation

The HDMI distribution kit features video control software that helps you manage your IP video distribution and video wall configuration. The software is available for iOS and/or Android™ devices.


1. Using a browser, navigate to [www.StarTech.com/ST12MHDLAN2K](http://www.StarTech.com/ST12MHDLAN2K).
2. Scroll down on the **Overview** tab and select the link for the store that corresponds with your device.
3. Download the StarTech.com Wall Control app.

## Connecting Transmitters and Receivers to the Software

**Note:** *To ensure the application functions properly, your router must support IGMP snooping. Please refer to your network switch or router documentation to ensure IGMP snooping is supported and enabled.*

1. Connect the device you installed the **StarTech.com Wall Control** app on to the same network as your transmitter(s) and receiver(s).
2. Select on the **StarTech.com Wall Control** icon.

- The app will open to the **DEVICES** screen and automatically populate the **DEVICES** screen with all Transmitters and Receivers connected to the network.

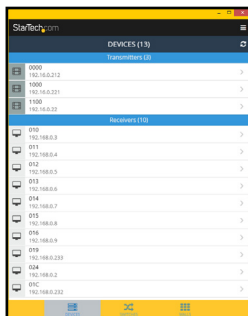



DEVICES screen


**Note:** You can re-initiate the device search, by selecting the **Refresh** button in the top right-hand corner of the **DEVICES** screen.

## Adjusting the IP Address and Subnet Masks

1. On the **DEVICES** screen, click on a **Transmitter** or **Receiver**.
2. The **Device Properties** screen will appear.


Device Properties		Error History (0)
Name:	0 	Advanced Parameters
Type:	Transmitter	vw_moninfo_ha: 5330
SKU:	ST12MHDLAN	vw_moninfo_ht: 5670
Status:	unknown	vw_moninfo_va: 3000
IP:	192.16.0.212 	vw_moninfo_vt: 3400
Subnet:	255.255.255.0	vw_max_row: 0
Host Name:	ast-gateway0000	vw_max_column: 0
		vw_row: 0
		vw_column: 0

Device Properties screen

3. Click the **Edit**  icon next to the IP address you wish to configure.




- The **Network Settings** screen will appear.

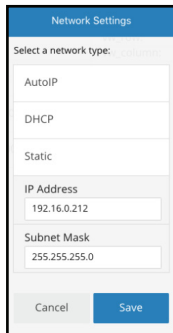

The screenshot shows a mobile application screen titled "Network Settings". At the top, there is a blue header with the text "Network Settings". Below the header, there is a section labeled "Select a network type:" with a dropdown menu currently showing "AutoIP". Below this, there are three radio button options: "AutoIP", "DHCP", and "Static". The "Static" option is selected. Below the radio buttons, there are two input fields: "IP Address" with the value "192.16.0.212" and "Subnet Mask" with the value "255.255.255.0". At the bottom of the screen, there are two buttons: "Cancel" and "Save".

Network Settings screen

- Select the **Static** button, an **IP Address** and **Subnet Mask** field will appear.



This screenshot is identical to the previous one, but the "Static" radio button is now selected, and the "IP Address" and "Subnet Mask" fields are visible below it. The "Save" button is highlighted in blue, indicating it is the active button.

Static Button

- Using the on-screen keyboard, enter an IP address and subnet mask for the device.

- or -

Select DHCP and your network will automatically assign an IP address and subnet mask to the device in the range of the rest of your network devices.

**Note:** DHCP must be enabled on your network to automatically assign an IP address and subnet mask.

- Click the **Save** button to apply the new IP address and subnet mask to the selected device.


- or -

Click the **Cancel** button to discard any changes made and return to the **Device Properties** screen.

## Switching Your Remote Displays Between Video Sources

- On the **DEVICES** screen, select the **SWITCHES**  button on the toolbar at the bottom of the screen.

2. The **SWITCHES** screen will appear.

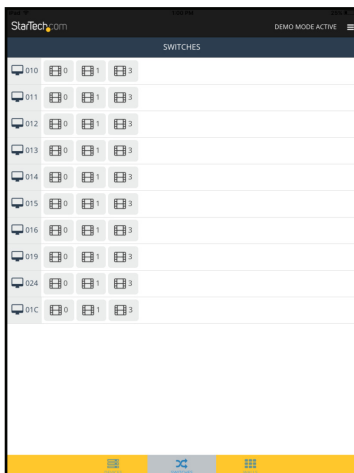

SWITCHES screen

3. A list of connected receivers and transmitters will be displayed. The transmitter that is currently selected for each receiver will be highlighted in yellow.


**Note:** *If the receiver is part of a video wall it will be indicated with a button that lists the wall configuration and the location of the receiver.*


4. To assign a **Video Source**, or change the **Video Source**, select the transmitter listed next to your receiver that you would like to display.

5. The transmitter will turn yellow and the **Video Source** will switch on the remote display.

**Note:** *If a receiver that was part of a video wall configuration is altered, that display will no longer be part of the video wall configuration.*


## Configuring Your Remote Displays for a Video Wall Application

1. On the **DEVICES** screen, select the **WALLS**  button on the toolbar at the bottom of the screen.
2. The **WALLS** screen will appear.

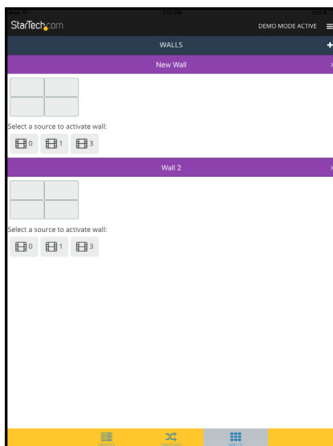

WALLS screen


3. Select the + icon, the **Video Wall** screen will appear.

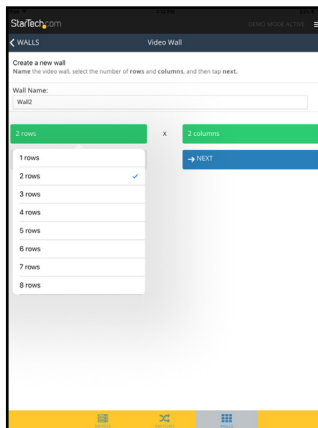

Video Wall screen

4. Select the **Wall Name** field. Using the on-screen keyboard enter a name for the new video wall configuration.

5. Select the **Rows** field. From the drop-down list select the number of rows in the video wall configuration.




Rows drop-down list

6. Select the **Columns** field. From the drop-down list, select the number of rows in the video wall configuration.

**Note:** The **Cancel** button will take you back to the **WALLS** screen without adding a video wall configuration.

7. Select the **Next** button. A video wall display will appear based on the number of rows and columns selected on the previous screen. The video wall display allows you to associate a connected receiver with each of the receiver locations in the video wall display.

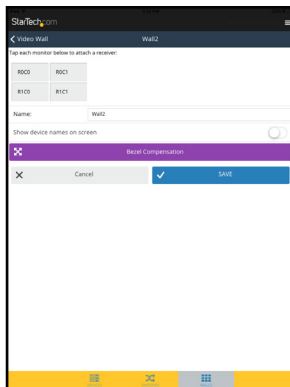


WALLS Screen

8. Select a receiver location on the video wall display. The **Pick a Receiver for** screen will appear.
9. Pick a receiver from the list of connected receivers.  
- or -  
Click the **Cancel** button to return to the previous screen.
10. Once a receiver is selected it will appear in yellow on the video wall display.

11. The **Name** field will list the **Wall Name** entered on the **Video Wall** screen by default. By selecting the **Name** field, the **Wall Name** can be overwritten.
12. To see the Receiver name on each screen, select the **Show device names on screen** switch.
13. (Optional) Select the **Bezel Compensation** button to scale the image on the displays to create a more natural, seamless look by specifying the bezel compensation.
14. The **Bezel Compensation** screen will appear:
  - **ScreenX:** Allows you to adjust the display's width in millimeters (mm).
  - **ScreenY:** Allows you to adjust the display's height in millimeters (mm).
  - **DisplayX:** Allows you to adjust the total width of the display in millimeters (mm).
  - **DisplayY:** Allows you to adjust the total height of the display in millimeters (mm).



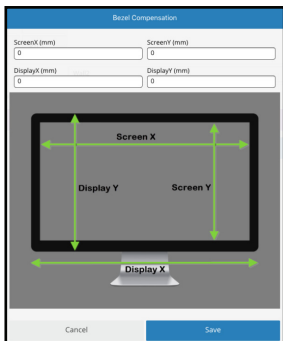

Bezel Compensation screen

15. Click the **Save** button to save the bezel compensation settings and return to the **Video Wall** screen.

- or -


Click the **Cancel** button to discard changes and return to the **Video Wall** screen.

16. On the **Video Wall** screen, click the **Save** button to save the video wall settings and return to the **WALLS** screen.

- or -

Click the **Cancel** button to discard changes and return to the **WALLS** screen.

17. The **WALLS** screen will appear.

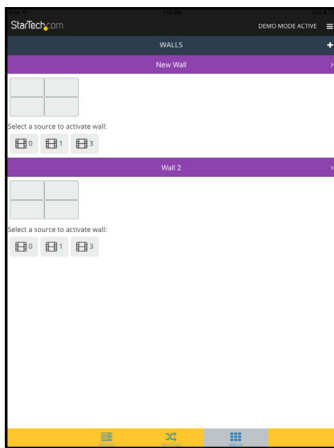


WALLS screen

18. The new video wall configuration will appear on the **WALLS** screen.
19. Select a **Source** (transmitter) to activate the video wall.
20. The selected source and receivers in the configuration will be highlighted:
- **Yellow:** Indicates which devices in the video wall configuration are active.
  - **Gray:** Indicates that the receiver is currently being used in another video wall configuration.

**Note:** You can adjust the settings defined for each video wall configuration or delete your video wall configuration by clicking the arrow next to each video wall.


## Adjusting Video Tear

1. On the **DEVICES** screen, select the **WALLS** button on the toolbar at the bottom of the screen.
2. The **WALLS** screen will appear.

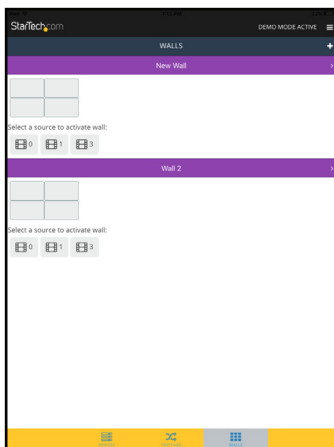

WALLS screen

3. Select on the **Arrow** icon next to the video wall name.
4. The **Video Wall** screen will appear.
5. Select the **Video Tear Correction** button.
6. The **Video Tear Correction** screen will appear.

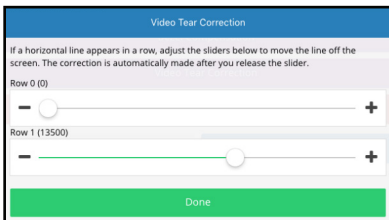

Video Tear Connection screen

7. Adjust the **Sliders** until the video tear line moves off the display.
8. Click the **Done** button once you have adjust the video tear.

## Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit [www.startech.com/support](http://www.startech.com/support) and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit [www.startech.com/downloads](http://www.startech.com/downloads)

## Warranty Information

This product is backed by a two-year warranty.

StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase.

During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only.

StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

## Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product.

Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## **Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.**

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions. We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit [www.startech.com](http://www.startech.com) for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.

### **Reviews**

Share your experiences using StarTech.com products, including product applications and setup, what you love about the products, and areas for improvement.

#### **StarTech.com Ltd.**

45 Artisans Cres.  
London, Ontario  
N5V 5E9  
Canada

FR: [fr.startech.com](http://fr.startech.com)  
DE: [de.startech.com](http://de.startech.com)

#### **StarTech.com LLP**

2500 Creekside Pkwy.  
Lockbourne, Ohio  
43137  
U.S.A.

ES: [es.startech.com](http://es.startech.com)  
NL: [nl.startech.com](http://nl.startech.com)

#### **StarTech.com Ltd.**

Unit B, Pinnacle 15  
Gowerton Rd., Brackmills  
Northampton  
NN4 7BW  
United Kingdom

IT: [it.startech.com](http://it.startech.com)  
JP: [jp.startech.com](http://jp.startech.com)