

4K 60Hz

HDMI™ 4K 60Hz UHD SwitchBox 4 Ports

- ✔ Supports both mechanical and intelligent switching
- ✔ Supported resolutions up to:
4096 x 2160p at 60Hz
- ✔ Supports Full 3D
- ✔ HDCP pass through
- ✔ Supports CEC function
- ✔ Supports compressed audio such as
DTS® Digital, Dolby® Digital



Include Remote Control




Introduction

The SenseVision HDMI™ 4K 60Hz UHD SwitchBox 4 Ports is a high- performance and small-sized HDMI™ 4K 60Hz UHD casing, which make it very strong and sturdy. An ideal assistant both at home and in the workplace.

This HDMI™ 4K 60Hz UHD SwitchBox routes high definition video, in resolutions up to 4K @ 60Hz, and digital audio from any of the 4 source- inputs to the connected 4K UHD television, monitor or projector.

The CSV-1370 SenseVision HDMI™ 4K 60Hz UHD SwitchBox comes with an IR Remote control bundled in the box.

Remote Control

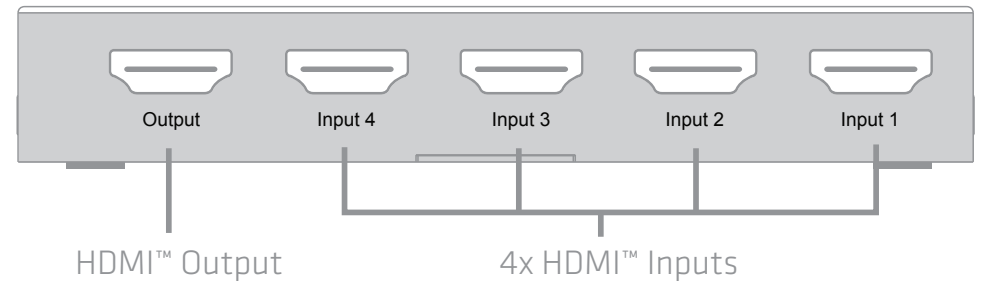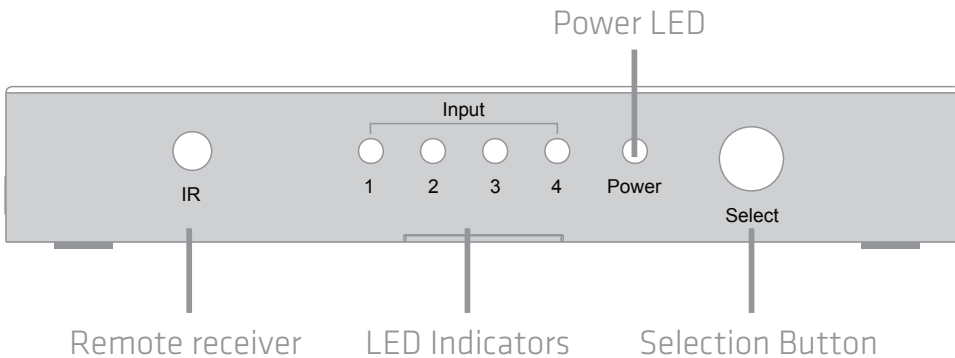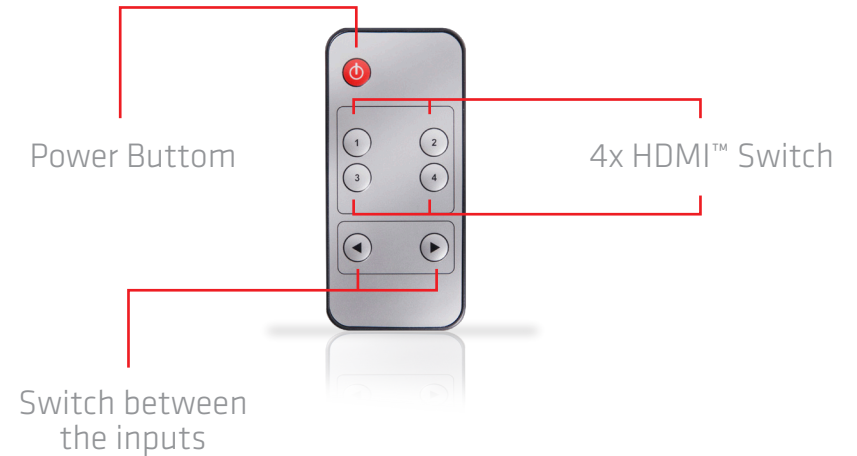



Package contents

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- HDMI™ 4K 60Hz UHD SwitchBox 4 Ports
- Power Adapter (5V/1A)
- IR Remote Control
- Manual

Features

- Supports both mechanical and intelligent switching
- Supported resolutions up to: 4096 x 2160p at 60Hz
- Supports Full 3D
- HDCP pass through
- Supports compressed audio such as DTS® Digital, Dolby® Digital
- EDID bypass
- Supports CEC function

Connection and operation

- 1) Connect the HDMI™ input source into the HDMI™ switcher. (Input cables are optional)
*Please refer to connection diagram section.
- 2) Press the button to select the inputs.
- 3) Connect the 5V/1A Power Adapter to the SwitchBox.

Operation Notes

- 1) Once the source device is turned on or plugged in (should stay power-on mode), the switcher will automatically select this source.
- 2) Once the source device is turned off or plugged out, the switcher will select the next power-on source depending on the sequence automatically
- 3) When the source devices are on the stand-by mode, its power supply should be turned off.
- 4) For use with 4K screens, please make sure to use HDMI Cables capable of 4K 60HZ / 18Gbps.

Specifications

Signal Inputs/Output	
Input Video	HDMI
Maximum Single Link Range	Full 3D and 4k*2k@60HZ
Output Video	HDMI
Operating Frequency	
Vertical Frequency Range	24/30/50/60Hz
Video Amplifier Bandwidth	6Gbps/600MHz
Resolutions(HDTV)	
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p,720p,1080p,4k*2k@30HZ, 4k*2k@60HZ,
Mechanical	
Size(L-W-H)	123x51x20mm
Weight(Net)	150g
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0°C to +40°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	5V/1A
Power consumption (Max)	1.74W
Accessories Adapter	
IR remote	38KZH NEC Standard
User Manual	English Version

Connection diagram

