



## APC RACK PDU EXTENDER, BASIC, 2U, 32A, 230V, (4) IEC C19 power distribution unit (PDU) 4 AC outlet(s) Black



**Brand :** APC

**Product code:** AP7585

**Product name :** RACK PDU EXTENDER, BASIC, 2U, 32A, 230V, (4) IEC C19

RACK PDU BASIC 2U 32A 230V (4) IEC C19


[APC RACK PDU EXTENDER, BASIC, 2U, 32A, 230V, \(4\) IEC C19 power distribution unit \(PDU\) 4 AC outlet\(s\) Black:](#)

The most mounting options in the market.

APC offers a wide variety of Basic Rack Power Distribution Units (PDUs), which allow users to distribute power outlets to rack-mount equipment. Horizontal and vertical units are available as well as a variety of power inputs and outputs to fit most power environments. APC now offers Basic Rack PDUs that mount vertically, without tools in the rear channel of a NetShelter VX.

APC RACK PDU EXTENDER, BASIC, 2U, 32A, 230V, (4) IEC C19. PDU types: Basic, Rack capacity: 2U, Mounting: Horizontal. AC outlets quantity: 4 AC outlet(s), AC outlet types: C19 coupler, Input connection type: Hard Wire 3-wire. Cable length: 8.53 m, Certification: CE,VDE. Nominal input voltage: 230 V, Nominal output voltage: 230 V, Output voltage: 230 V. Dimensions (WxDxH): 437 x 89 x 89 mm, Weight: 4.09 kg

Design		Power	
PDU types *	Basic	Output voltage	230 V
Rack capacity *	2U	Load capacity	7680 VA
Mounting	Horizontal	Maximum power	7680 W
Product colour	Black	<b>Weight &amp; dimensions</b>	
<b>Ports &amp; interfaces</b>		Dimensions (WxDxH)	437 x 89 x 89 mm
AC outlets quantity *	4 AC outlet(s)	Weight	4.09 kg
AC outlet types *	C19 coupler	<b>Packaging data</b>	
I/O ports	(4) IEC 320 C19 Hard Wire 3-wire	Package dimensions (WxDxH)	521 x 521 x 152 mm
Input connection type	Hard Wire 3-wire	Package weight	5 kg
Output connections	(4) IEC 320 C19	<b>Operational conditions</b>	
<b>Features</b>		Operating temperature (T-T)	0 - 45 °C
Cable length	8.53 m	Storage temperature (T-T)	-25 - 65 °C
Certification	CE,VDE	Operating relative humidity (H-H)	0 - 95%
<b>Power</b>		Storage relative humidity (H-H)	0 - 95%
Nominal input voltage *	230 V		
Nominal output voltage	230 V		

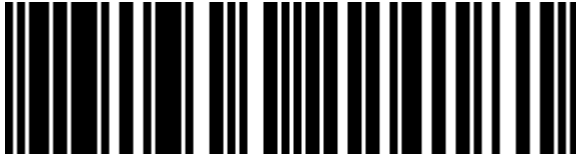

0731304224181



731304224181



0042111934850



042111934850

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.