



APC Back-UPS Pro UPS-virtalähde Linjainteraktiivinen 1,2 kVA 720 W

Tuotemerkki : APC

Tuotekoodi: BR1200G-GR


Tuotteen nimi : Back-UPS Pro

APC Back-UPS Pro. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,2 kVA, Lähtöteho: 720 W. Pistorasian tyypit: Tyyppi F. Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 187 VAH, Tyypillinen varmuuskopioaika täydellä kuormituksella: 5,4 min. Tuotteen väri: musta, Johdon pituus: 1,83 m, Näytön tyyppi: LCD. Tuotteen leveys: 112 mm, Tuotteen syvyys: 382 mm, Tuotteen korkeus: 301 mm



Features		Design	
UPS topology *	Line-Interactive	Cable length	1.83 m
Output power capacity *	1.2 kVA	Product colour *	Black
Output power *	720 W	Display type	LCD
Waveform *	Sine	LED indicators	✓
Input operation voltage (min) *	156 V	Certification	BSI 1363, CE, NEMKO, REACH
Input operation voltage (max) *	300 V	Operational conditions	
Input frequency *	50/60 Hz	Operating temperature (T-T)	0 - 40 °C
Output frequency regulation	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Automatic Voltage Regulation (AVR)	✓	Operating relative humidity (H-H)	0 - 95%
Maximum current	10 A	Storage relative humidity (H-H)	0 - 95%
Surge energy rating	441 J	Operating altitude	0 - 3000 m
Hold time (min)	10 ms	Non-operating altitude	0 - 15000 m
Hold time (max)	12 ms	Technical details	
Efficiency	98.8%	Sustainability certificates	ENERGY STAR, Green Premium
Noise level	45 dB	Compliance certificates	RoHS
Surge protection	✓	Weight & dimensions	
Surge protection features	Digital Subscriber Line (DSL), Fax, Modem, Network	Width	112 mm
Audible alarm(s)	✓	Depth	382 mm
Ports & interfaces		Height	301 mm
AC outlet types	Type F	Weight	13 kg
Number of type F outputs	6	Package width	235 mm
USB port	✗	Package depth	490 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Package height	390 mm
Battery capacity	187 VAh	Package weight	13.8 kg
Typical backup time at full load	5.4 min	Packaging data	
Typical backup time at half load	15.7 min	Cables included	Phone (RJ-11), USB cable
Battery recharge time	8 h	Manual	✓
Automatic battery test	✓	Warranty card	✓
Cold start	✓	Software CD	✓
		Bundled software	PowerChute Personal Edition
		Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V

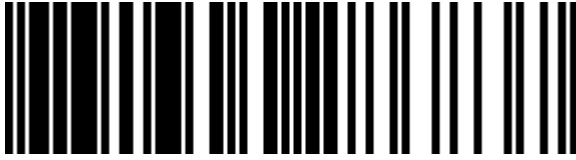

0731304286837



731304286837

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.