



TP-Link CPE210 300 Mbit/s Valkoinen Power over Ethernet -tuki

Tuotemerkki : TP-Link

Tuotekoodi: CPE210 V1

Tuotteen nimi : CPE210

TP-Link CPE210. 2,4 GHz, Tiedonsiirron enimmäisnopeus: 300 Mbit/s. Tietoturva-algoritmit: SSID, TKIP, WPA, WPA-PSK, WPA2, WPA2-PSK. Power over Ethernet -tuki. Tuotteen väri: Valkoinen. Tehonkulutus (maks.): 10,5 W



Features		Design	
2.4 GHz *	✓	International Protection (IP) code	IPX5
5 GHz *	✗	Reset button	✓
6 GHz *	✗	LED indicators	✓
Maximum data transfer rate *	300 Mbit/s	Internal	✗
Maximum data transfer rate (2.4 GHz)	300 Mbit/s	Antenna	
Wi-Fi data rate (max)	300 Mbit/s	Antenna type *	Internal
Frequency band	2.4 - 2.483 GHz	Antenna features	Integrated antenna
Bandwidth	2.4 GHz	Antennas quantity	1
Networking standards	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Antenna gain level (max)	9 dBi
MIMO	✓	Performance	
VLAN support	✓	Built-in processor	✓
Virtual LAN features	Tagged VLAN	Processor model	Qualcomm Atheros
Maximum outdoor range	5000 m	Processor frequency	560 MHz
	802.11b: 11M: -95dBm, 5.5M: -96dBm, 2M: -96dBm, 1M: -96dBm	Flash memory	8 MB
	-802.11g: 54M: -79dBm, 48M: -80dBm, 36M: -84dBm, 6-24M: -88dBm	Internal memory	64 MB
	802.11n: MCS15: -76dBm, MCS14: -78dBm, MCS13: -80dBm, MCS12: -84dBm, MCS11: -87dBm, MCS10: -91dBm, MCS9: -93dBm, MCS8: -96dBm, MCS7: -76dBm, MCS6: -78dBm, MCS5: -80dBm, MCS4: -84dBm, MCS3: -87dBm, MCS2: -91dBm, MCS1: -93dBm, MCS0: -96dBm	Compatible operating systems	Microsoft Windows 98SE, NT, 2000, XP, Vista or Windows 8, Windows 7, MAC OS, NetWare, UNIX or Linux.
Receiver sensitivity		Certificates	
		Certification	- FCC/UL/IC/GS/PSB/C-tick/SAA/S-Mark/KC-mark - RoHS, IPX5
Security		Weight & dimensions	
Security algorithms *	SSID, TKIP, WPA, WPA-PSK, WPA2, WPA2-PSK	Width	224.4 mm
MAC address filtering	✓	Depth	79 mm
IGMP snooping	✓	Height	60.3 mm
Protocols		Packaging data	
Management protocols	TDMA	Package width	270 mm
		Package depth	132 mm
		Package height	106 mm
		Packaging content	
		Cables included	AC

Management features		Packaging content	
Web-based management	✓	Mounting kit	✓
Management platform	Pharos Control	Other features	
Ports & interfaces		Transmit power range	0 - 27 dBmW
Ethernet LAN (RJ-45) ports *	1	Operational conditions	
WAN connection	Ethernet (RJ-45)	Operating relative humidity (H-H)	10 - 90%
Power		Operating temperature (T-T)	-30 - 70 °C
Power over Ethernet (PoE) *	✓	Storage temperature (T-T)	-40 - 70 °C
DC voltage range	16 - 27 V	Storage relative humidity (H-H)	5 - 95%
Power consumption (max)	10.5 W	Logistics data	
Design		Harmonized System (HS) code	85176990
Placement *	Wall		
Product colour *	White		




0845973071677



845973071677



8459730716774

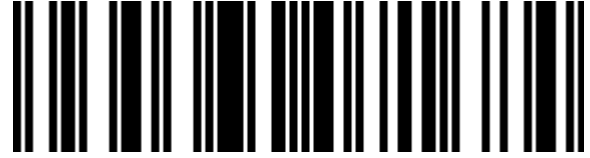

6935364071684

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.