


CS72U/CS74U

2/4-Port USB KVM Switch

- The CS72U / CS74U 2/4-Port USB KVM Switch is a desktop control unit that allows users to access two or four computers from a single KVM console (keyboard and mouse, audio and VGA monitor).


With the CS72U / CS74U, you can access computers conveniently using port selection pushbuttons located on the unit's front panel.

Setup is fast and easy; simply plug cables into their appropriate ports. There is no software to configure, no installation routines, and no incompatibility problems. Since the CS72U / CS74U intercepts keyboard input directly, it will work on multiple computing platforms.



Features

- One VGA console controls two (CS72U) or four (CS74U) USB VGA interface computers
- Computer selection via front panel pushbuttons
- Multiplatform support – Windows, Linux and Mac
- Audio Enabled – full bass response provides a rich experience for 2.1 channel surround sound systems
- Superior video quality – 2048 x 1536; DDC2B
- Supports USB hot-plugging
- Non-powered

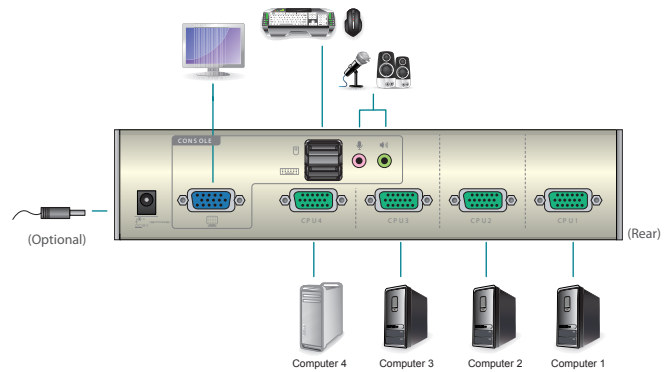

Specification

Function		CS72U	CS74U
Computer Connections		2	4
Port Selection		Front Panel Pushbuttons	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (Black)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x USB Type A Female (Black)
		Microphone	1 x mini stereo Jack Female (Pink)
		Speaker	1 x mini stereo Jack Female (Green)
KVM Ports		2 x SPHD-18 Female (Green)	4 x SPHD-18 Female (Green)
Power		1 x DC 5V Jack (Spare)	
LEDs	On Line	2 (Orange)	4 (Orange)
	Selected	2 (Green)	4 (Green)
Switches	Selected	2 x Pushbuttons	4 x Pushbuttons
Video		2048 x 1536 @ 60 Hz; DDC2B	
Power Consumption		DC5V: 0.142W: 5BTU	DC5V: 0.177W: 5BTU
Environment	Operating Temp.	0–50°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	0.45 kg	0.64 kg
	Dimensions (L x W x H)	13.00 x 7.65 x 4.40 cm	20.00 x 7.65 x 4.40 cm

* Product specifications and appearance are subject to change without notice.

