



## D-Link GO-SW-8E/E network switch Unmanaged Fast Ethernet (10/100) White



**Brand :** D-Link


**Product code:** GO-SW-8E/E

**Product name :** GO-SW-8E/E

8x 10BASE-T, 1.6Gbps, 2K MAC, 141.5 x 78.5 x 23.8 mm

D-Link GO-SW-8E/E. Switch type: Unmanaged. Basic switching RJ-45 Ethernet ports type: Fast Ethernet (10/100), Basic switching RJ-45 Ethernet ports quantity: 8. Full duplex. MAC address table: 2000 entries. Networking standards: IEEE 802.3, IEEE 802.3az, IEEE 802.3x. Power connector: DC-in jack

Management features		Weight & dimensions	
Switch type *	Unmanaged	Width	141.5 mm
Ports & interfaces		Depth	78.5 mm
Basic switching RJ-45 Ethernet ports quantity *	8	Height	23.8 mm
Basic switching RJ-45 Ethernet ports type *	Fast Ethernet (10/100)	Packaging data	
Power connector	DC-in jack	Package width	104 mm
Network		Package depth	158 mm
Networking standards *	IEEE 802.3, IEEE 802.3az, IEEE 802.3x	Package height	94 mm
10G support *	✗	Package weight	282.8 g
Full duplex	✓	Technical details	
Auto MDI/MDI-X	✓	Shipping (inner) case height	35 cm
Data transmission		Shipping (inner) case width	21.1 cm
MAC address table *	2000 entries	Shipping (inner) case length	54.3 cm
Store-and-forward	✓	Shipping (inner) case net weight	3.82 kg
Jumbo frames support	✓	Products per shipping (inner) case	20 pc(s)
Design		Pallet gross weight (air)	333.7 kg
Rack mounting *	✗	Master (outer) cases per pallet (air)	50 pc(s)
Stackable *	✗	Products per pallet (air)	1000 pc(s)
Product colour	White	Pallet gross length	110 cm
LED indicators	✓	Pallet gross width	120 cm
Power over Ethernet (PoE)		Pallet height (air)	188.5 cm
Power over Ethernet (PoE) *	✗	Pallet gross weight (sea)	333.7 kg
Other features		Master (outer) cases per pallet (sea)	50 pc(s)
Power LED	✓	Products per pallet (sea)	1000 pc(s)
Operational conditions		Pallet height (sea)	188.5 cm
Operating temperature (T-T)	0 - 40 °C	Shipping (inner) case gross weight	6.28 kg
Storage temperature (T-T)	-10 - 70 °C	Logistics data	
Operating relative humidity (H-H)	10 - 90%	Harmonized System (HS) code	85176990
Storage relative humidity (H-H)	5 - 90%		

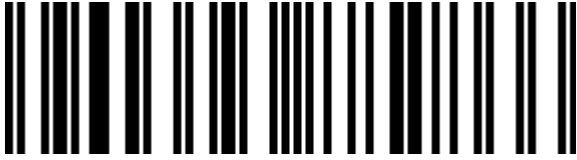

7900693882866



0790069388286



790069388286

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.