



APC Smart-UPS UPS-virtalähde Linjainteraktiivinen 0,45 kVA 280 W 4 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SC450RM1U

Tuotteen nimi : Smart-UPS



APC Smart-UPS. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 0,45 kVA, Lähtöteho: 280 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 4 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 108 VAH, Tyypillinen varmuuskopioaika täydellä kuormituksella: 5,9 min. Kotelo: Telineasennettava/Torni, Tuotteen väri: Harmaa, Telineen kapasiteetti: 1U. Tuotteen leveys: 432 mm, Tuotteen syvyys: 383 mm, Tuotteen korkeus: 44 mm



| Features | | Battery | |
|------------------------------------|--|-----------------------------------|---------------------------------|
| UPS topology * | Line-Interactive | Hot-swap battery | ✓ |
| Output power capacity * | 0.45 kVA | Automatic battery test | ✓ |
| Output power * | 280 W | Design | |
| Waveform * | Sine | Form factor * | Rackmount/Tower |
| Input operation voltage (min) * | 151 V | Rack capacity | 1U |
| Input operation voltage (max) * | 302 V | Product colour * | Grey |
| Input frequency * | 50/60 Hz | LED indicators | Battery replacement |
| Automatic Voltage Regulation (AVR) | ✓ | Certification | C-tick, CE, GOST, VDE, PEP, EOL |
| Surge energy rating | 320 J | Operational conditions | |
| Hold time (min) | 4 ms | Operating temperature (T-T) | 0 - 40 °C |
| Hold time (max) | 8 ms | Storage temperature (T-T) | -15 - 45 °C |
| Noise level | 38 dB | Operating relative humidity (H-H) | 0 - 95% |
| Surge protection | ✓ | Storage relative humidity (H-H) | 0 - 95% |
| Surge protection features | Digital Subscriber Line (DSL), Fax, Modem, Network | Operating altitude | 0 - 3000 m |
| Audible alarm(s) | ✓ | Non-operating altitude | 0 - 15000 m |
| Audible alarm modes | Low battery alarm, Overload alarm | Technical details | |
| Auto-restart | ✓ | Compliance certificates | RoHS |
| Ports & interfaces | | Weight & dimensions | |
| AC outlet types | C13 coupler | Width | 432 mm |
| Power plug | C14 coupler | Depth | 383 mm |
| AC outlets quantity | 4 AC outlet(s) | Height | 44 mm |
| Number of output IEC jumpers | 2 | Weight | 10.2 kg |
| Serial interface | ✓ | Package width | 476 mm |
| Serial interface type | RS-232 | Package depth | 589 mm |
| Serial ports quantity | 1 | Package height | 164 mm |
| Battery | | Package weight | 11.7 kg |
| Battery technology | Sealed Lead Acid (VRLA) | | |


| Battery | | Packaging data | |
|----------------------------------|-----------|-----------------------------|----------|
| Battery capacity | 108 VAh | Rack mount kit | ✓ |
| Typical backup time at full load | 5.9 min | Cables included | RS-232 |
| Typical backup time at half load | 19.4 min | Manual | ✓ |
| Battery life (max) | 5 year(s) | Software CD | ✓ |
| Battery recharge time | 5 h | | |
| | | Logistics data | |
| | | Products per pallet | 24 pc(s) |
| | | Harmonized System (HS) code | 85078000 |
| | | Other features | |
| | | Nominal output voltage | 230 V |



0731304222712



731304222712

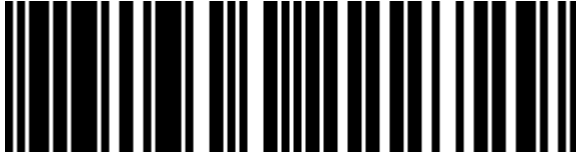

0731304222729



731304222729



0071090238727



071090238727

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.