



APC SBP16KRMI4U Keskeytymättömän tehonsyötön (UPS) lisätarvike

Tuotemerkki : APC

Tuotekoodi: SBP16KRMI4U


Tuotteen nimi : SBP16KRMI4U



APC SBP16KRMI4U. Tuotetyyppi: Ohituskytkin, Kiinnitystyyppi: Telinekiinnitys, Tuotteen väri: musta. Latauskapasiteetti: 20000 VA, Tulojännite: 230 V, Syötteen taajuus: 50/60 Hz. Tuotteen leveys: 432 mm, Tuotteen syvyys: 673 mm, Tuotteen korkeus: 178 mm



| Features                             |  | Weight & dimensions               |             |
|--------------------------------------|--|-----------------------------------|-------------|
| Product type *                       | Bypass switch                                      | Height                            | 178 mm      |
| Mounting type                        | Rack-mount   | Weight                            | 21.8 kg     |
| Product colour                       | Black  | Package width                     | 610 mm      |
| Rack capacity                        | 4U   | Package depth                     | 991 mm      |
| Compatibility                        | CSA, EN 60950, GOST, IEC 60950, IEC 60950, UL 1778 | Package height                    | 305 mm      |
| Certification                        | CSA, EN 60950, GOST, IEC 60950, IEC 60950, UL 1778 | Package weight                    | 31.8 kg     |
| Power                                |  | Operational conditions            |             |
| Load capacity                        | 20000 VA   | Operating temperature (T-T)       | -20 - 45 °C |
| Input voltage                        | 230 V  | Storage temperature (T-T)         | -40 - 65 °C |
| Input frequency                      | 50/60 Hz   | Operating relative humidity (H-H) | 0 - 95%     |
| Number of phases                     | 1  | Storage relative humidity (H-H)   | 0 - 95%     |
| Maximum total current draw per phase | 100 A  | Operating altitude                | 0 - 4500 m  |
|                                      |  | Non-operating altitude            | 0 - 15000 m |
| Weight & dimensions                  |  | Technical details                 |             |
| Width                                | 432 mm   | Compliance certificates           | RoHS        |
| Depth                                | 673 mm   | Logistics data                    |             |
|                                      |  | Harmonized System (HS) code       | 85079080    |

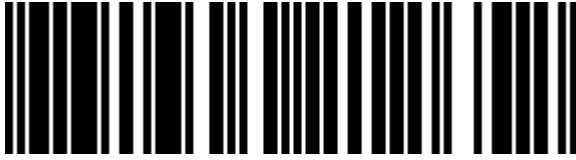

0731304212652



731304212652

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.