



APC SMX1000I

Tuotemerkki : APC

Tuotekoodi: SMX1000I

Tuotteen nimi : SMX1000I



Smart-UPS X 1000VA LCD line-interactive UPS, räkki/tornimalli

APC SMX1000I. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1 kVA, Lähtöteho: 800 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 8 AC-pistorasia(a).

Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 299 VAh, Tyypillinen varmuuskopioaika täydellä kuormituksella: 8,1 min. Kotelo: Telineasennettava/Torni, Tuotteen väri: musta, Telineen kapasiteetti: 2U. Tuotteen leveys: 432 mm, Tuotteen syvyys: 490 mm, Tuotteen korkeus: 89 mm



Features

UPS topology *	Line-Interactive
Output power capacity *	1 kVA
Output power *	800 W
Waveform *	Sine
Input operation voltage (min) *	151 V
Input operation voltage (max) *	302 V
Input frequency *	50/60 Hz
Output frequency regulation	50/60 Hz
Automatic Voltage Regulation (AVR)	✓
Surge energy rating	600 J
Efficiency	98.2%
Emergency Power Off (EPO)	✓
Noise level	40 dB
Surge protection	✓
Audible alarm(s)	✓
Audible alarm modes	Low battery alarm, Overload alarm
Auto-restart	✓

Ports & interfaces

AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	8 AC outlet(s)
Number of output IEC jumpers	2
USB port	✓
SmartSlot	✓

Battery

Battery technology	Sealed Lead Acid (VRLA)
Battery capacity	299 VAh

Design

Form factor *	Rackmount/Tower
Rack capacity	2U
Cable length	1.83 m
Product colour *	Black
LED indicators	✓
Certification	CE, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE, REACH, PEP, EOL

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m


Technical details

Sustainability certificates	Green Premium
Compliance certificates	RoHS

Weight & dimensions

Width	432 mm
Depth	490 mm
Height	89 mm
Weight	22.9 kg
Package width	589 mm
Package depth	620 mm
Package height	246 mm
Package weight	27.3 kg

Battery		Packaging data	
Typical backup time at full load	8.1 min	Rack mount kit	✓
Typical backup time at half load	24.2 min	Cables included	RS-232, USB cable
Battery life (max)	5 year(s)	Quick installation guide	✓
Battery recharge time	3 h	Software CD	✓
Hot-swap battery	✗	Logistics data	
Automatic battery test	✓	Products per pallet	8 pc(s)
Cold start	✓	Harmonized System (HS) code	85078000
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Removable support feet

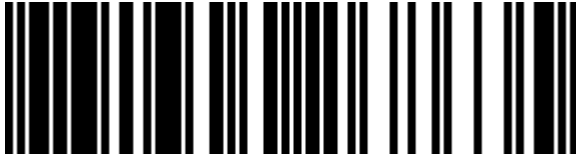

0731304268635



731304268635



4053162301986

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.