



## ATEN VE882-AT-G AV-signaalin jatkaja AV-lähetin ja -vastaanotin musta

**Tuotemerkki :** ATEN


**Tuotekoodi:** VE882-AT-G

**Tuotteen nimi :** VE882-AT-G

ATEN VE882-AT-G. Malli: AV-lähetin ja -vastaanotin, Enimmäiserottelutarkkuus: 1920 x 1080 pikseliä, Suurin siirtoetäisyys: 600 m. Yhteysteknologia: Langallinen, Valokuituliitin: SFP. Käyttöjännite (lähetin): 5,3 V, Käyttöjännite (vastaanotin): 5,3 V, Tehonkulutus (TX): 5,8 W. Paino: 1,43 kg, Vastaanottimen mitat (L x S x K): 141,7 x 103 x 30 mm, Vastaanottimen paino: 440 g. Pakkauksen leveys: 100 mm, Pakkauksen syvyys: 283 mm, Pakkauksen korkeus: 173 mm



Features		Power	
Type *	AV transmitter & receiver	Power consumption (TX)	5.8 W
Maximum resolution *	1920 x 1080 pixels	Power consumption (RX)	4.69 W
Maximum transfer distance	600 m	<b>Operational conditions</b>	
Maximum refresh rate	60 Hz	Operating temperature (T-T)	0 - 40 °C
Fiber mode structure	Multi-mode, Single-mode	Storage temperature (T-T)	-20 - 60 °C
Electrostatic Discharge (ESD) protection	✓	Operating relative humidity (H-H)	0 - 80%
Electrostatic Discharge (ESD) protection	15 kV	Storage relative humidity (H-H)	0 - 80%
Supported video modes	1080p	<b>Weight &amp; dimensions</b>	
Bandwidth	6.75 Gbit/s	Weight	1.43 kg
Bandwidth	225 MHz	Receiver dimensions (WxDxH)	141.7 x 103 x 30 mm
HDCP	✓	Receiver weight	440 g
Material	Metal	Transmitter dimensions (WxDxH)	141.7 x 103 x 30 mm
3D	✓	Transmitter weight	440 g
Rack mounting	✓	<b>Packaging data</b>	
Impedance	100 Ω	Package width	100 mm
HDCP version	1.4	Package depth	283 mm
Product colour	Black	Package height	173 mm
<b>Ports &amp; interfaces</b>		Package weight	1.57 kg
Connectivity technology *	Wired	<b>Logistics data</b>	
HDMI in	1	Master (outer) case width	292 mm
Number of HDMI outputs	1	Master (outer) case length	517 mm
Fiber optic connector	SFP	Master (outer) case height	194 mm
Remote (IR) input	1	Master (outer) case gross weight	8.66 kg
Remote (IR) output	1	Master (outer) case net weight	7.15 kg
DC-in jack	✓	Products per master (outer) case	5 pc(s)
<b>Power</b>			
Operating voltage (transmitter)	5.3 V		
Operating voltage (receiver)	5.3 V		

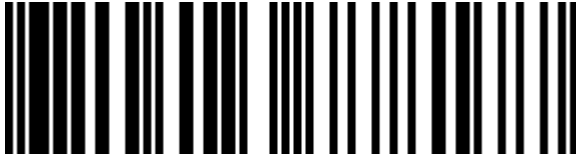

4710423778177

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 25-DEC-2024. Prints or copies of Information are only valid on the printed Publication date