



## Lindy 1m Cat.8.1 S/FTP LSZH Cable, Grey

**Brand :** Lindy

**Product code:** 47442

**Product name :** 1m Cat.8.1 S/FTP LSZH Cable, Grey

1m Cat.8.1 S/FTP LSZH Cable, Grey


[Lindy 1m Cat.8.1 S/FTP LSZH Cable, Grey:](#)

Cat.8.1 S/FTP LSZH network cable with support for bandwidth up to 2000MHz and features a snagless design with gold plated contacts for ethernet standards up to 40GBase-T.

Cat.8.1 cable with S/FTP shielding (braid for overall shield and foil shield for each individual wire pair). With operating frequencies up to 2000MHz they are equipped for ethernet standards 25GBase-T and 40GBase-T. These cables are manufactured and tested according to the ISO/IEC 11801 specification.

The gold-plated contacts ensure reliable, corrosion-free connections over extensive periods of time. A robust snagless strain relief design prevents damage to the connector latch during installation and removal. The halogen-free sheath material of the LSZH cable makes the product suitable for use in public spaces with its low smoke emission and elimination of toxic halogen emissions.

Available in the following lengths: 0.3m, 0.5m, 1m, 1.5m, 2m, 3m, 5m

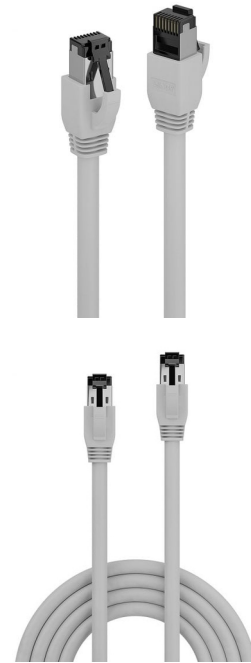

| Features                   |                               | Features                       |             |
|----------------------------|-------------------------------|--------------------------------|-------------|
| Product colour *           | Grey                          | AWG wire size                  | 26          |
| Cable length *             | 1 m                           | Frequency                      | 2000 MHz    |
| Cable standard *           | Cat8.1                        | Bend radius (min)              | 6 cm        |
| Cable shielding *          | S/FTP (S-STP)                 | <b>Operational conditions</b>  |             |
| Connector 1 *              | RJ-45                         | Operating temperature (T-T)    | -10 - 60 °C |
| Connector 2 *              | RJ-45                         | Storage temperature (T-T)      | -20 - 75 °C |
| Connector 1 gender *       | Male                          | <b>Weight &amp; dimensions</b> |             |
| Connector 2 gender *       | Male                          | Width                          | 12 mm       |
| Connector 1 form factor    | Straight                      | Depth                          | 38.5 mm     |
| Connector 2 form factor    | Straight                      | Height                         | 17 mm       |
| Connector contacts plating | Nickel                        | Outer diameter                 | 7.5 mm      |
| Connector shielding        | ✓                             | <b>Packaging data</b>          |             |
| Connector shield material  | Aluminium                     | Package type                   | Polybag     |
| Jacket material            | Low smoke zero halogen (LSZH) | <b>Technical details</b>       |             |
| Conductor material         | Copper                        | Sustainability compliance      | ✓           |
|                            |                               | Compliance certificates        | REACH, RoHS |



4002888474429

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-NOV-2024. Prints or copies of Information are only valid on the printed Publication date