



## Canon CanoScan LiDE 300 flatbed scanner, Black

**Brand :** Canon

**Product family:** CanoScan

**Product code:** 2995C010

**Product name :** CanoScan LiDE 300 flatbed scanner, Black




CanoScan LiDE 300 flatbed scanner, Black

[Canon CanoScan LiDE 300 flatbed scanner, Black:](#)

Benefit from easy functionality with a straightforward USB connection in CanoScan LiDE 300's compact and affordable package. Complex menus are a thing of the past; 4 EZ operations give you the functions you need at the touch of a button, including scan to email or PDF, copy and Auto Scan, which chooses the perfect settings for you every time. You can reap the rewards of impressive speed (A4 300 dpi scan in 10 seconds) and quality too – receive scans of up to 2,400x4,800 dpi and eliminate distortion with Auto Document Fix and Auto Photo Fix<sup>1</sup> for clear, accurate and pristine results.

Canon CanoScan LiDE 300 flatbed scanner, Black. Maximum scan size: 216 x 297 mm, Optical scanning resolution: 2400 x 2400 DPI, Input colour depth: 48 bit. Scanner type: Flatbed scanner, Product colour: Black. Sensor type: CIS, Light source: RGB LED. Maximum ISO A-series paper size: A4, ISO A-series sizes (A0...A9): A4. Standard interfaces: USB 2.0

Scanning		Ports & interfaces	
Maximum scan size *	216 x 297 mm	Standard interfaces	USB 2.0
Optical scanning resolution *	2400 x 2400 DPI	<b>Power</b>	
Colour scanning	✓	Power supply type *	USB
Input colour depth	48 bit	Power consumption (typical)	4.5 W
Output colour depth	48 bit	Power consumption (standby)	0.3 W
Input greyscale depth	16 bit	<b>Weight &amp; dimensions</b>	
Output greyscale depth	8 bit	Width	250 mm
<b>Design</b>		Depth	367 mm
Scanner type *	Flatbed scanner	Height	42 mm
Product colour *	Black	Weight	1.7 kg
Built-in display *	✗	<b>Packaging content</b>	
<b>Performance</b>		Bundled software	Scan Gear for Win Scan Utility for Win
Sensor type *	CIS	<b>System requirements</b>	
Light source	RGB LED	Windows operating systems supported	✓
<b>Paper handling</b>		Mac operating systems supported	✓
Maximum ISO A-series paper size *	A4	<b>Operational conditions</b>	
ISO A-series sizes (A0...A9)	A4	Operating temperature (T-T)	5 - 35 °C
Letter	✓	Operating relative humidity (H-H)	10 - 90%
<b>Ports &amp; interfaces</b>		<b>Logistics data</b>	
USB port *	✓	Harmonized System (HS) code	84716070
USB version	2.0		

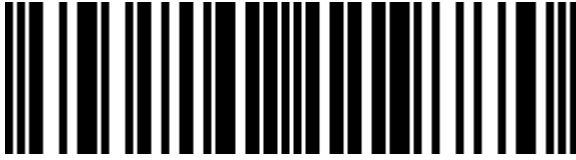

4549292119770



5715063326091

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.