

IB-3620 Series External 2 bay enclosure for 2x 3.5" SATA l/ll/lll HDDs as JBOD (IB-3620U3) or RAID (IB-RD3620SU3) version

Key features

- Silent operation by thermal controlled fan
- Energy saving by supporting sleep modus!
- Easy assembling by trayless design!
- HDD capacity unlimited
- For Windows & MAC
- Plug & Play & Hot Swap
- IB-3620U3:
- IB-RD3620SU3: RAID 0, 1, JBOD (Spanning/Single)

JBOD (Single)







Packing content:

1x device, 1x external power supply and cable, 1x USB cable, 1x eSATA cable (RAID Version only) 2x handles, 1x set of screws, 1x quick installation guide

 $\label{eq:rescaled} RaidSonic Technology GmbH \bullet Kurt-Fischer-Straße 50 \bullet 22926 \ Ahrensburg / \ Germany \\ Telephone: +49-(0)4102 - 468 \ 900 \ (Sales) \bullet Fax: +49-(0)4102 - 468 \ 901 \bullet \ www.raidsonic.de \\ Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted. \\ \end{tabular}$




Techniscal data

Model	IB-3620U3	IB-RD3620SU3
Article No.	20620	20621
EAN Code	4250078186748	4250078186755
Brand	ICY BOX	
Article text	External 2 bay JBOD system for	External 2 bay RAID system for
	3.5" SATA I/II/III HDDs	3.5" SATA I/II/III HDDs
Colour	Black	
Material	Aluminium/plastic	
HDD interface	3.5" SATA	
HDD capacity	unlimited (> 3 TB each HDD)	
Hot Swap	Yes	
Plug & Play	Yes	
Ext. data interface	USB 3.0	USB 3.0, eSATA
RAID level	JBOD (Single)	RAID 0, 1, JBOD (Spanning/Single)
LED:	Power, fan, interface, HDD in use and access and additionell	
	HDD in use and RAID access (IB-RD3620SU3)	
Fan	1x 60x60x10 mm smart fan, thermal controlled	
OS	Windows & MAC	
Transfer rate	USB 3.0 up to 5.0 Gbit/s, eSATA up to 3.0 Gbit/s	
Power button	Yes	
Auto rebuilding	No	Yes
Power connector	External power supply, Input: AC 100~240 V,	
	Output: 12 V / 3 A / 36 W (IB-3620U3), 12 V / 4 A /48 W (IB-RD3620SU3)	

Description for RAID modes of IB-RD3620SU3

JBOD (RAID 0 Spanning)	Spanning concatenates multiple hard drives as a single large volume; resulting in a seamless expansion of virtual volumes beyond the physical limitations of separately connected hard drives. The data are written from HDD1 to HDD2.	
JBOD (Single)	Hard drives are being handled independently as separate logical volumes where files are stored.	
RAID 0 (RAID 0 Striping)	Striping is a method of concatenating multiple hard drives into one logical storage unit. It is the automated process of	
	writing data across multiple drives simultaneously. Striping is used to increase the performance of disk reads. The multiple	
	hard drives will write data in "column" effect. If one drive in a striped set fails, all of the data in the stripe set is lost.	
RAID 1 (RAID1 Mirroring)	Mirroring is the automated process of writing data to multiple drives simultaneously. Mirroring is used to provide	
	redundancy. If one drive fails, the redundant drive will continue to store the data and provide access to it. The failed	
	drive can then be replaced and the drive set can be rebuild.	

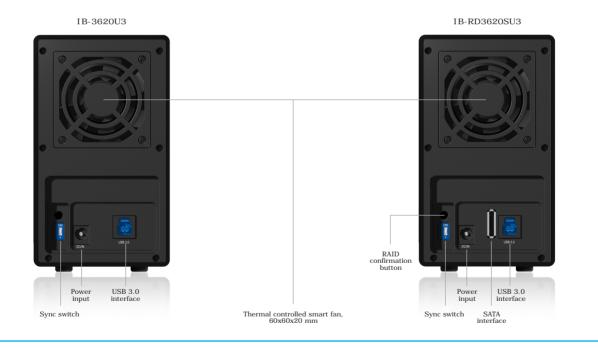

Logistical data: IB-3620U3 (a:) and IB-RD3620SU3 (b:)

Packing unit/carton: Total weight/carton: Gross weight/packing: Net weight/article: 10 pcs a: 18.30 kg, b: 20.52 kg a: 1.72 kg, b: 1.94 kg 1.11 kg Dimension/carton: Dimension/packing: Dimension/article: Country of origin: 606x503x290 mm 293x270x155 mm 126x166x215 mm Taiwan

 $\label{eq:rescaled} RaidSonic Technology GmbH \bullet Kurt-Fischer-Straße 50 \bullet 22926 \ Ahrensburg / \ Germany \\ Telephone: +49-(0)4102 - 468 \ 900 \ (Sales) \bullet Fax: +49-(0)4102 - 468 \ 901 \bullet \ www.raidsonic.de \\ Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted. \\ \end{array}$

