


## Item No. 62945

# Delock Converter U.2 SFF-8639 / SFF-8643 NVMe > 1 x M.2 Key M

### Description

This Delock converter enables the connection of an M.2 SSD in 22110, 2280, 2260, 2242 and 2230 format. The converter can be installed into the system internally through U.2 SFF-8639 or U.2 SFF-8643 interface.

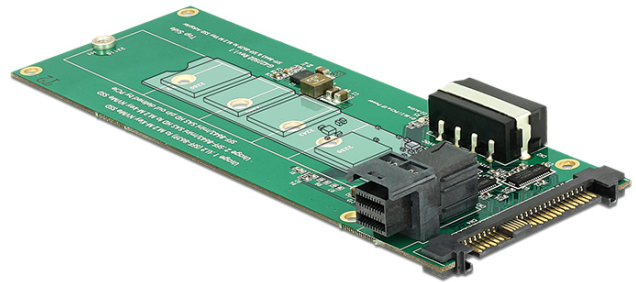

### Specification

- Connectors:
  - 1 x 68 pin U.2 SFF-8639 male
  - 1 x 36 pin SFF-8643 female
  - 1 x 67 pin M.2 key M slot
  - 1 x Molex 4 pin male
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Supports NVM Express (NVMe)
- Maximum output current: 4 A
- Over current protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 145 x 52 x 16 mm

### System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6.x
- A free U.2 SFF-8639 interface or
- A free U.2 SFF-8643 interface

### Package content

- Converter
- Mounting material
- User manual

### Additional Information



EAN: 4043619629459

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
function:	NVM Express (NVMe)
Supported operating system:	Linux ex Kernel 4.6 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	power and activity
Slot:	PCIe
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	ESD (Electrostatic Discharge) Overheating protection Overcharge protection
Interface	
connector 1:	1 x 68 pin U.2 SFF-8639 male
connector 2:	1 x 36 pin SFF-8643 female
connector 3:	1 x 67 pin M.2 key M slot
connector 4:	1 x Molex 4 pin male
Physical characteristics	
Length:	142 mm
Width:	52 mm
Height:	16 mm