


Item No. 62944

Delock 2.5" Converter SATA 22 pin > 1 x M.2 / 1 x CFast - 9.5 mm Enclosure

Description

This converter by Delock enables the connection of an M.2 SSD in 2280, 2260, 2242 and 2230 format or a CFast memory card. The converter can be installed into the system through the SATA interface.

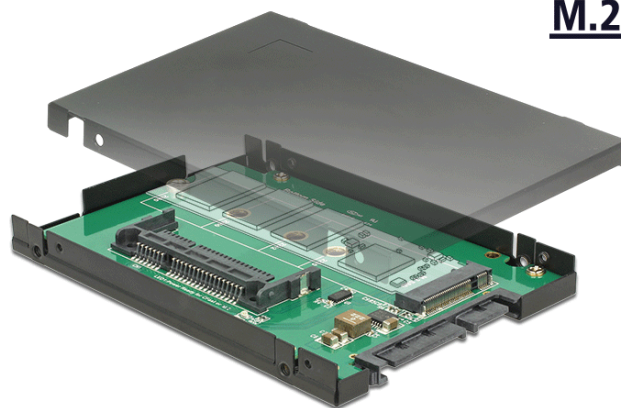

Specification

- Connectors:
1 x SATA 6 Gb/s 22 pin plug >
1 x M.2 key B slot
1 x CFast slot
- Supports CFast 1.0 and 2.0
- Interface: SATA
- Form factor 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.35 mm, application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Maximum power for modules: 4 A
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Bootable
- LED indicator
- Dimensions (LxWxH): ca. 100 x 70 x 9.5 mm

System requirements

- A free SATA interface
- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.17.x / Kernel 4.x.x

Package content

- Converter SATA > M.2 / CFast
- 2.5" enclosure
- Mounting material
- User manual

Additional Information



EAN: 4043619629442

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
Form factor:	2.5"
function:	bootable
Supported operating system:	Linux ex Kernel 3.17 Linux ex Kernel 4.x.x Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection
Interface	
connector 1:	1 x SATA 6 Gb/s 22 pin plug
connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x CFast slot
Physical characteristics	
Length:	100 mm
Width:	70 mm
Height:	9.5 mm