


# Delock Converter U.2 SFF-8639 NVMe / SATA 22 pin > 1 x M.2 Key M

## Description

This Delock converter enables the connection of a M.2 SSD in 22110, 2280, 2260, 2242 and 2230 format. It allows the possibility to connect a PCIe or SATA M.2 SSD. The converter can be installed into your system internally through the SATA 22 pin interface while using a SATA M.2 SSD, or via the U.2 interface while using a PCIe M.2 SSD.

**M.2 NVMe**

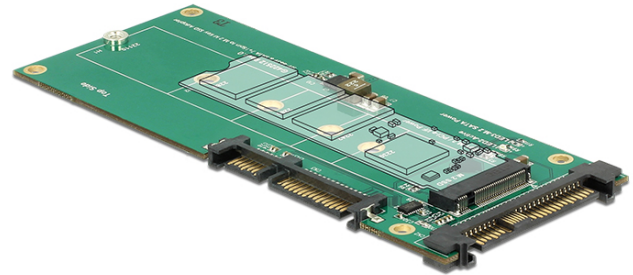

## Specification

- Connectors:
  - 1 x U.2 SFF-8639 male (for PCIe SSDs 2 or 4 lanes)
  - 1 x SATA 6 Gb/s 22 pin receptacle (for SATA SSDs)
  - 1 x 67 pin M.2 key M slot
- Interface: SATA / PCIe (2 or 4 lanes)
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Bootable
- Supports NVM Express (NVMe)
- Maximum output current: 3 A
- Over current protection, over heating protection, short circuit protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 130 x 52 x 6 mm

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.20
- A free U.2 SFF-8639 interface (PCIe SSD) or
- A free SATA 22 pin interface (SATA SSD)

## Package content

- Converter
- Mounting material
- User manual

## Item No. 62864


EAN: 4043619628643

Country of origin: Taiwan, Republic of China

Package: Retail Box



## Images



General	
function:	Bootable, ex UEFI version 2.3.1 NVM Express (NVMe)
Supported operating system:	Linux ex Kernel 3.2 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	power and activity
Slot:	PCIe SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection
Interface	
connector 1:	1 x U.2 SFF-8639 male
connector 2:	1 x SATA 6 Gb/s 22 pin plug
connector 3:	1 x 67 pin M.2 key M slot
Physical characteristics	
Length:	130 mm
Width:	52 mm
Height:	6 mm