


Delock PCI Express x4 Karte > 1 x intern NVMe M.2 Key M 110 mm mit Kühlkörper - Low Profile Form Faktor

Description

This PCI Express card by Delock expands the PC by one M.2 slot. An M.2 SSD in format 22110, 2280, 2260 and 2242 can be connected. By the heat sink, which can be positioned on different applicable positions, can be ensured a good heat dissipation of the memory module.

M.2 NVMe

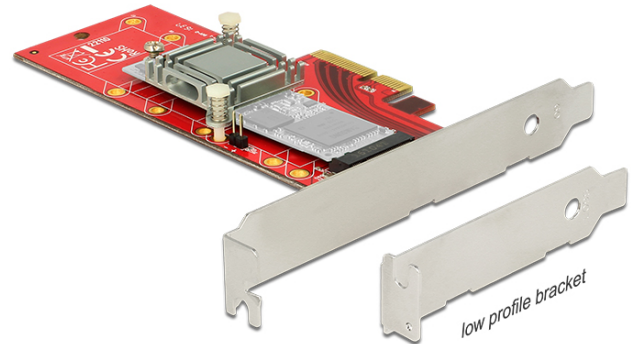

Specification

- Connectors:
internal:
1 x 67 pin M.2 key M slot
1 x PCI Express x4, V3.0
1 x 2 pin LED pin header male
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 39 Gbps
- Supports M.2 modules with up to 3.3 V / 5 A
- Supports NVMe Express (NVMe)

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 3.3.x / Kernel 4.x.x
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- Heat sink
- Mounting material
- User manual

Item No. 89577



EAN: 4043619895779

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
Form factor:	Low Profile
function:	NVM Express (NVMe)
Supported operating system:	Linux ex Kernel 3.3 Linux ex Kernel 4.x.x Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	PCIe
Supported module:	M.2 modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe M.2 modules with up to 3.3 V / 5 A
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x PCI Express x4, V3.0 1 x 2 pin LED pin header male 1 x 67 pin M.2 key M slot
Technical characteristics	
Data transfer rate:	up to 39 Gbps