



## TP-Link EAP225 867 Mbit/s Valkoinen Power over Ethernet -tuki

**Tuotemerkki :** TP-Link

**Tuotekoodi:** EAP225 V3


**Tuotteen nimi :** EAP225

TP-Link EAP225. 2,4 GHz, 5 GHz, Tiedonsiirron enimmäisnopeus: 867 Mbit/s. Tietoturva-algoritmit: 64-bit WEP, 128-bit WEP, 152-bit WEP, SSID, WPA, WPA-PSK, WPA2, WPA2-PSK. Power over Ethernet -tuki.  
Tuotteen väri: Valkoinen



Features		Design	
2.4 GHz *	✓	Placement *	Ceiling, Wall
5 GHz *	✓	Product colour *	White
6 GHz *	✗	Reset button	✓
Maximum data transfer rate *	867 Mbit/s	LED indicators	Power, WLAN
Maximum data transfer rate (2.4 GHz)	450 Mbit/s	<b>Antenna</b>	
Maximum data transfer rate (5 GHz)	867 Mbit/s	Antenna type *	Internal
Automatic channel selection	✓	Antenna direction type	Omni-directional
Automatic channel scanning	✓	Antennas quantity	3
MIMO	✓	<b>Performance</b>	
MIMO type	Multi User MIMO	Built-in processor	✓
Wi-Fi Multimedia (WMM)/(WME)	✓	<b>Certificates</b>	
VLAN support	✓	Certification	CE, FCC, RoHS
Rate limiting	✓	<b>Weight &amp; dimensions</b>	
Wireless isolation	✓	Width	205.5 mm
Band steering	✓	Depth	181.5 mm
Quality of Service (QoS) support	✓	Height	37.1 mm
<b>Security</b>		<b>Packaging data</b>	
Security algorithms *	64-bit WEP, 128-bit WEP, 152-bit WEP, SSID, WPA, WPA-PSK, WPA2, WPA2-PSK	Package width	340 mm
MAC address filtering	✓	Package depth	228 mm
Number of SSID supported	16	Package height	65 mm
<b>Management features</b>		Package weight	910 g
Web-based management	✓	<b>Packaging content</b>	
Local AP management	Telnet	Quantity per pack	1 pc(s)
Syslog	✓	PoE adapter included	✓
		Cables included	AC

Ports & interfaces		Packaging content	
Ethernet LAN (RJ-45) ports *	1	Mounting kit	✓
Power		Operational conditions	
Power over Ethernet (PoE) *	✓	Operating relative humidity (H-H)	10 - 90%
Power over Ethernet (PoE) type supported	Active PoE, Passive PoE	Operating temperature (T-T)	0 - 60 °C
Output voltage	24 V	Storage temperature (T-T)	-40 - 70 °C
		Storage relative humidity (H-H)	5 - 90%
		Logistics data	
		Harmonized System (HS) code	85176990

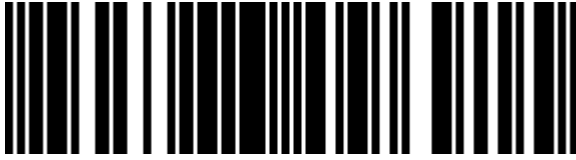

0845973096915




845973096915



5415247165064



6935364096922

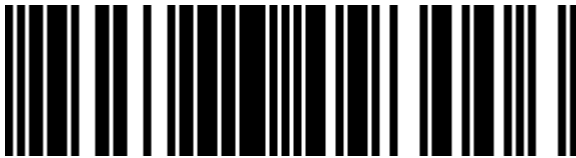

0845973093006



845973093006

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.