





APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 15 kVA 15000 W

Tuotemerkki : APC

Tuotekoodi: E3SUPS15KH

Tuotteen nimi : Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 15 kVA, Lähtöteho: 15000 W. Kotelo: Tower, Tuotteen väri: Valkoinen, International Protection (IP)-koodi: IP20. Sertifiointi: CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE. Tuotteen leveys: 250 mm, Tuotteen syvyys: 700 mm, Tuotteen korkeus: 530 mm. Pakkauksen leveys: 400 mm, Pakkauksen syvyys: 857 mm, Pakkauksen korkeus: 772 mm

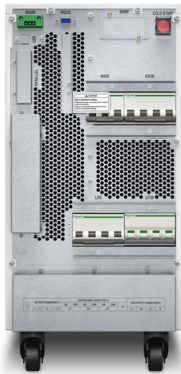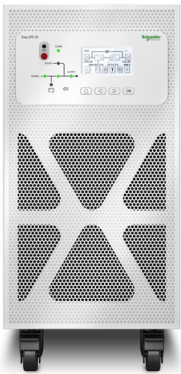


Features		Design	
UPS topology *	Double-conversion (Online)	Product colour *	White
Output power capacity *	15 kVA	International Protection (IP) code	IP20
Output power *	15000 W	Operational conditions	
Waveform *	Pure sine	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (min) *	304 V	Storage temperature (T-T)	-15 - 40 °C
Input operation voltage (max) *	477 V	Operating relative humidity (H-H)	0 - 95%
Input frequency *	45/65 Hz	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (min)	380 V	Operating altitude	0 - 984.3 m
Output operation voltage (max)	415 V	Non-operating altitude	0 - 14763.6 m
Output frequency	50/60 Hz	Certificates	
Maximum current	28 A	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE
Number of input phases	3	Packaging content	
Number of output phases	3	Quick installation guide	✓
Input power factor	0.99	Weight & dimensions	
Crest factor	3:1	Width	250 mm
Overload capacity (10 minutes)	125%	Depth	700 mm
Overload capacity (1 minute)	150%	Height	530 mm
Output voltage Total Harmonic Distortion (THD)	3%	Weight	36 kg
Input current Total Harmonic Distortion (THD)	3%	Packaging data	
Noise level	60 dB	Package width	400 mm
Power protection features	Overload		

Design		Packaging data	
Form factor *	Tower	Package depth	857 mm
		Package height	772 mm
		Package weight	50 kg
		Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Output voltage	400 V



0731304339335



731304339335

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.