




## APC Easy 3S UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 30 kVA 30000 W

**Tuotemerkki :** APC

**Tuotekoodi:** E3SUPS30KHB2

**Tuotteen nimi :** Easy 3S

APC Easy 3S. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 30 kVA, Lähtöteho: 30000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Tyypillinen varmuuskopioaika täydellä kuormituksella: 25 min. Kotelo: Tower, Tuotteen väri: Valkoinen, Näytön tyyppi: LED. Tuotteen leveys: 500 mm, Tuotteen syvyys: 969 mm, Paino: 584 kg. Ulostulojännite: 400 V

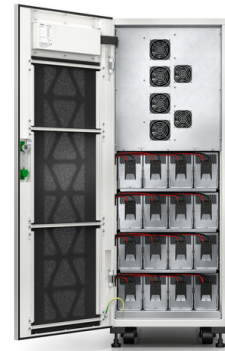

Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	30 kVA	Product colour *	White
Output power *	30000 W	Display type	LED
Waveform *	Pure sine	International Protection (IP) code	IP20
Input operation voltage (min) *	304 V	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH
Input operation voltage (max) *	477 V		
Input frequency *	45/65 Hz	Operational conditions	
Output operation voltage (min)	380 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	415 V	Storage temperature (T-T)	-15 - 40 °C
Output frequency	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Maximum current	55 A	Storage relative humidity (H-H)	0 - 95%
Number of input phases	3	Operating altitude	0 - 999.9 m
Number of output phases	3	Non-operating altitude	0 - 15000 m
Input power factor	0.99	Technical details	
Output voltage Total Harmonic Distortion (THD)	3%	Compliance certificates	RoHS
Input current Total Harmonic Distortion (THD)	3%	Weight & dimensions	
Noise level	63 dB	Width	500 mm
Battery		Depth	969 mm
Battery technology	Sealed Lead Acid (VRLA)	Weight	584 kg
Battery voltage	240 V	Package width	683 mm
Number of batteries supported	4	Package depth	1114 mm
Typical backup time at full load	25 min	Package height	1640 mm
		Package weight	638 kg

**Packaging data**


Quick installation guide ✓

**Logistics data**

Harmonized System (HS) code 85078000

**Other features**

Output voltage 400 V

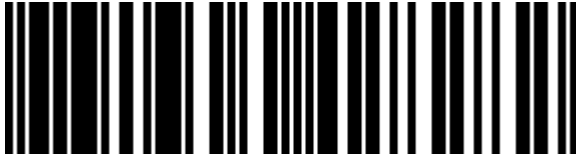

0731304428282



731304428282



8592978131609

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.