



APC Easy UPS 3S uninterruptible power supply (UPS) Double-conversion (Online) 40 kVA 40000 W

Brand : APC

Product code: E3SUPS40KHB1


Product name : Easy UPS 3S

APC Easy UPS 3S. UPS topology: Double-conversion (Online), Output power capacity: 40 kVA, Output power: 40000 W. Serial interface type: RS-232. Battery technology: Sealed Lead Acid (VRLA), Battery voltage: 240 V, Typical backup time at full load: 10 min. Form factor: Tower, Product colour: White, Display type: LCD. Compliance certificates: RoHS, Certification: CE, EAC, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH



| Features | | Design | |
|--|----------------------------|------------------------------------|---|
| UPS topology * | Double-conversion (Online) | Form factor * | Tower |
| Output power capacity * | 40 kVA | Product colour * | White |
| Output power * | 40000 W | Display type | LCD |
| Waveform * | Pure sine | International Protection (IP) code | IP20 |
| Input operation voltage (min) * | 304 V | Operational conditions | |
| Input operation voltage (max) * | 477 V | Operating temperature (T-T) | 0 - 40 °C |
| Input frequency * | 50/60 Hz | Storage temperature (T-T) | -15 - 40 °C |
| Output operation voltage (min) | 380 V | Operating relative humidity (H-H) | 0 - 95% |
| Output operation voltage (max) | 400 V | Storage relative humidity (H-H) | 0 - 95% |
| Output frequency regulation | 45 - 65 Hz | Operating altitude | 0 - 9999 m |
| Maximum current | 73 A | Non-operating altitude | 0 - 15000 m |
| Number of input phases | 3 | Certificates | |
| Number of output phases | 3 | Compliance certificates | RoHS |
| Efficiency | 96% | Certification | CE, EAC, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE, REACH |
| Emergency Power Off (EPO) | ✓ | Safety regulation & standards | |
| Output voltage Total Harmonic Distortion (THD) | 3% | Safety | IEC 62040-1-1 |
| Noise level | 63 dB | Weight & dimensions | |
| Ports & interfaces | | Width | 500 mm |
| USB port | ✓ | Depth | 969 mm |
| Serial interface | ✓ | Height | 1400 mm |
| Serial interface type | RS-232 | Weight | 590 kg |

| Battery | | Packaging data | |
|----------------------------------|-------------------------|-----------------------------|----------|
| Battery technology | Sealed Lead Acid (VRLA) | Package width | 683 mm |
| Battery voltage | 240 V | Package depth | 1114 mm |
| Typical backup time at full load | 10 min | Package height | 1640 mm |
| | | Package weight | 643 kg |
| | | Logistics data | |
| | | Harmonized System (HS) code | 85078000 |

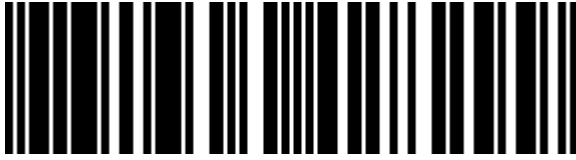

0731304428299



731304428299



8592978409234

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.