


D-Link DEM-QX01Q-SR4 lähetin-vastaanotinmoduuli Valokuitu 40000 Mbit/s QSFP+ 850 nm

Tuotemerkki : D-Link

Tuotekoodi: DEM-QX01Q-SR4

Tuotteen nimi : DEM-QX01Q-SR4

D-Link DEM-QX01Q-SR4. SFP-vastaanottimen tyyppi: Valokuitu, Tiedonsiirron enimmäisnopeus: 40000 Mbit/s, PCI-väylä: QSFP+. Tuotteen väri: Beige, Hopea. Tulojännite: 3.3 V, Enimmäisvirta: 0,35 A. Vaatimustenmukaisuustodistukset: RoHS, Sertifiointi: • FCC Class B • CE Class B • VCCI Class B • FDA/CDRH • TUV • CSA. Tuotteen leveys: 18,4 mm, Tuotteen syvyys: 115,8 mm, Tuotteen korkeus: 13,3 mm

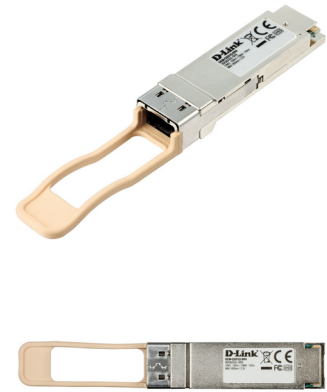

Performance		Operational conditions	
SFP transceiver type *	Fiber optic	Storage relative humidity (H-H)	0 - 85%
Maximum data transfer rate *	40000 Mbit/s	Weight & dimensions	
Interface type *	QSFP+	Width	18.4 mm
Multi-mode fiber (MMF) supported	✓	Depth	115.8 mm
Fiber optic connector	MPO	Height	13.3 mm
SFP transceiver standard	SR4	Weight	40 g
Maximum transfer distance	150 m	Packaging data	
Wavelength	850 nm	Package width	74 mm
Tx power (min)	-7.6 dBmW	Package depth	131 mm
Tx power (max)	2.4 dBmW	Package height	49 mm
Rx power (min)	-9.5 dBmW	Package weight	64 g
Rx power (max)	2.4 dBmW	Logistics data	
Link budget	11.9 dB	Shipping (inner) case length	36 cm
Networking standards	IEEE 802.3ba	Shipping (inner) case width	26 cm
Digital Diagnostics Monitoring (DDM)	✓	Shipping (inner) case height	31 cm
Features		Shipping (inner) case net weight	3.2 kg
Product colour	Beige, Silver	Products per shipping (inner) case	50 pc(s)
Hot-Plug support	✓	Pallet gross weight (air)	272 kg
Power		Master (outer) cases per pallet (air)	60 pc(s)
Input voltage	3.3 V	Products per pallet (air)	3000 pc(s)
Maximum current	0.35 A	Pallet gross length	102 cm
Certificates		Pallet gross width	122 cm
Compliance certificates	RoHS	Pallet height (air)	199 cm
Certification	• FCC Class B • CE Class B • VCCI Class B • FDA/CDRH • TUV • CSA	Pallet gross weight (sea)	272 kg
Operational conditions		Master (outer) cases per pallet (sea)	60 pc(s)
Operating temperature (T-T)	0 - 70 °C	Products per pallet (sea)	3000 pc(s)
Storage temperature (T-T)	-10 - 75 °C	Pallet height (sea)	199 cm
Operating relative humidity (H-H)	0 - 85%	Shipping (inner) case gross weight	4.2 kg
		Harmonized System (HS) code	85369010



0790069415319



790069415319

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.