


Item No. 62949

Delock Converter M.2 Key A+E male > 1 x RJ45 Gigabit LAN port vertical

Description

This converter by Delock expands the system by one RJ45 Gigabit LAN port.

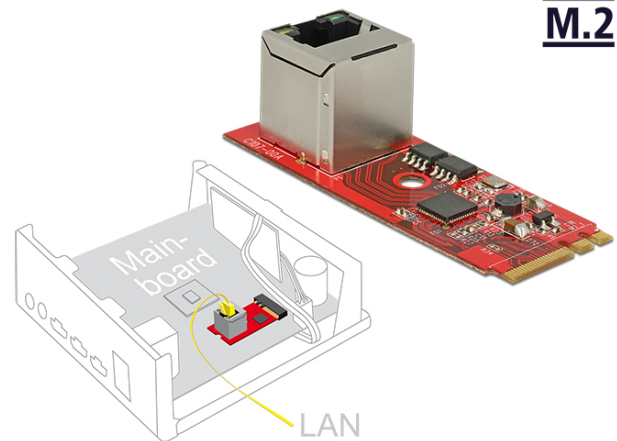

Specification

- Connectors:
 - 1 x 59 pin M.2 key A+E male >
 - 1 x Gigabit LAN RJ45 female
- Chipset: Realtek RTL8168E
- Interface: PCIe
- Form factor: M.2 2260
- Suitable for M.2 slot with key A or E based on PCIe
- Data transfer rate:
 - Ethernet up to 10 Mb/s (Half/Full Duplex)
 - Fast Ethernet up to 100 Mb/s (Half/Full Duplex)
 - Gigabit Ethernet up to 1000 Mb/s (Half/Full Duplex)
- Compatible with:
 - IEEE 802.3: 10BASE-T
 - IEEE 802.3u: 100BASE-TX
 - IEEE 802.3ab: 1000BASE-T
- Support Auto MDI-X (automatic detection of standard or crossover network cable)
- Supports Wake On LAN (WOL)
- Supports IEEE 802.3x full duplex flow control
- Supports IEEE 802.1Q Virtual LAN (VLAN)
- Microsoft® NDIS5 Checksum Offload (IP, TCP, UDP)
- Supports 9k Jumbo Frames
- LED indicator for power and activity
- Dimensions (LxWxH): ca. 60 x 22 x 20 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38 / Kernel 4.9.4
- One free M.2 key A or key E slot

Package content

- Converter
- Driver CD
- User manual

Additional Information

EAN: 4043619629497

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General

Form factor:	M.2 2260
Supported operating system:	Linux ex Kernel 2.6.38 Linux ex Kernel 4.9.4 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	power and activity
Slot:	PCIe

Interface

connector 1:	1 x 59 pin M.2 key A+E male
connector 2:	1 x Gigabit LAN RJ45 female

Technical characteristics

Chipset:	Realtek RTL8168E
Data transfer rate:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps

Physical characteristics

Length:	60 mm
Width:	22 mm
Height:	20 mm