




## Delock PCI Express Card > 2 x internal M.2 Key B with RAID -Low Profile Form Factor

### Description

This PCI Express card by Delock expands the PC by two M.2 slots. It can be connected up to two M.2 SATA modules in format 22110, 2280, 2260, 2242, 2230 to the card. When using more than one SSD, there is the possibility to use different RAID level.



### ltem No. 89536

EAN: 4043619895366

Country of origin: Taiwan, Republic of China

Package: Box



### Specification

# Connector: internal: 2 x 67 pin M.2 key B slot 1 x PCI Express x4

- Interface: SATA
- $\bullet$  Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M
- based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, SPAN
- 4 x LED indicator
- Bootable


### System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.3
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

#### Package content

- PCI Express card
- · Low profile bracket
- 2 x fixing screw
- User manual

### Images

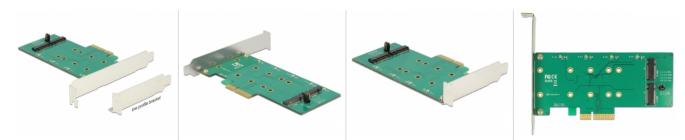





| General                             |  |
|-------------------------------------|--|
| Supported operating system:         | Linux Kernel 3.19  |
|                                     | Windows 7 32-bit   |
|                                     | Windows 7 64-bit   |
|                                     | Windows 8.1 32-bit   |
|                                     | Windows 8.1 64-bit   |
|                                     | Windows 10 32-bit  |
|                                     | Windows 10 64-bit  |
| LED indicator:                      | 4 x  |
| Slot:                               | SATA   |
| Supported module:                   | M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based |
|                                     | on SATA  |
| Maximum height of the components on | 1.5 mm application of double-sided assembled modules supported                     |
| the module:                         |  |
| Interface                           |  |
| Internal:                           | 1 x PCI Express x4, V2.0   |
|                                     | 2 x 67 pin M.2 key B slot  |
| Technical characteristics           |  |
| Data transfer rate:                 | 6 Gb/s   |
| RAID function:                      | SPAN   |
|                                     | 0  |
|                                     | 1  |