



TP-Link TL-SL1218MP Hallitsematon Gigabit Ethernet (10/100/1000) Power over Ethernet -tuki 1U musta

Tuotemerkki : TP-Link

Tuotekoodi: TL-SL1218MP V1

Tuotteen nimi : TL-SL1218MP



TP-Link TL-SL1218MP. Kytkin tyyppi: Hallitsematon. Peruskytkentä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytkentä RJ-45 Ethernet-porttien määrä: 20. MAC-osoitetaulukko: 8000 entries, Kytkentäkapasiteetti: 7,2 Gbit/s. Verkkostandardit: IEEE 802.3af, IEEE 802.3at. Power over Ethernet -tuki. Telineasennus, Kotelo: 1U



Management features		Power	
Switch type *	Unmanaged	Power source *	AC
Ports & interfaces		Power supply included *	✓
Basic switching RJ-45 Ethernet ports quantity *	20	AC input voltage	100 - 240 V
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	AC input frequency	50 - 60 Hz
Fast Ethernet (copper) ports quantity	16	Power consumption (max)	217.22 W
Gigabit Ethernet (copper) ports quantity	2	Power over Ethernet (PoE)	
Combo SFP ports quantity	2	Power over Ethernet (PoE) *	✓
Network		Power over Ethernet plus (PoE+) ports quantity	16
Networking standards *	IEEE 802.3af, IEEE 802.3at	Power over Ethernet (PoE) power per port	30 W
10G support *	✗	Total Power over Ethernet (PoE) budget	192 W
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Operational conditions	
Auto MDI/MDI-X	✓	Operating temperature (T-T)	0 - 40 °C
Auto-negotiation	✓	Storage temperature (T-T)	-40 - 70 °C
MAC address auto-learning supported	✓	Operating relative humidity (H-H)	10 - 90%
MAC address auto-aging supported	✓	Storage relative humidity (H-H)	5 - 90%
		Heat dissipation	741.15 BTU/h
Data transmission		Weight & dimensions	
Switching capacity *	7.2 Gbit/s	Width	440 mm
Forwarding rate	5.36 Mpps	Depth	180 mm
MAC address table *	8000 entries	Height	44 mm
Store-and-forward	✓	Packaging content	
Jumbo frames support	✓	Cables included	LAN (RJ-45)
Jumbo frames	10000	Manual	✓

Data transmission		Packaging data	
Packet buffer memory	4.1 MB	Package type	Box
Design		Package width	250 mm
Rack mounting *	✓	Package depth	528 mm
Stackable *	✗	Package height	80 mm
Form factor	1U	Package weight	2.96 kg
Product colour	Black	Certificates	
LED indicators	LAN, PoE, Status	Certification	CE, FCC, RoHS
Number of fans	2 fan(s)	Logistics data	
		Harmonized System (HS) code	85176990



6935364099817




6935364099824



0693536409982



693536409982

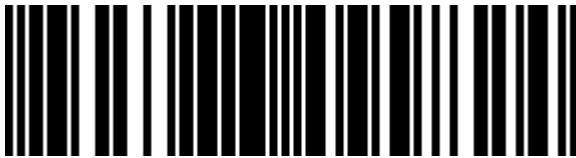

0845973099824



845973099824

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.