



## CLUB3D Mini DisplayPort 1.4 to DisplayPort Extension Cable 8K60Hz DSC 1.2 HBR3 HDR Bidirectional F/M 1m/3.28ft

**Brand :** CLUB3D

**Product code:** CAC-1120

**Product name :** Mini DisplayPort 1.4 to DisplayPort Extension Cable 8K60Hz DSC 1.2 HBR3 HDR Bidirectional F/M 1m/3.28ft



MiniDisplayPort™ 1.4 to DisplayPort™ Extension Cable 8K60Hz DSC 1.2 HBR3 HDR Bidirectional F/M

[CLUB3D Mini DisplayPort 1.4 to DisplayPort Extension Cable 8K60Hz DSC 1.2 HBR3 HDR Bidirectional F/M 1m/3.28ft:](#)


CAC-1120- Club 3D MiniDisplayPort™ 1.4 to DisplayPort Bidirectional Extension Cable 8K60Hz DSC 1.2 HBR3 HDR enables the connection of your standard DisplayPort™ supported (Gaming) PC or Laptop to any miniDisplayport™ cable to extend the distance to your miniDisplayPort™ supported Television, Monitor, Projector or other miniDisplayPort™ supported device. DisplayPort™ 1.4 adds support for Display Stream Compression 1.2 (DSC), Forward Error Correction, and extends the maximum number of inline audio channels to 32.

It features locking DisplayPort™ connectors providing a secure, dependable connection. Simply press the built-in one-touch latch button to unlock the connector.

The soft UltraFlex jacket protects the cable from bends and deformation damage. The Cable is 32AWG and fully Bi-Directional.



Features		Features	
DisplayPort version	1.4a	Bandwidth	32000 MB/s
Maximum resolution *	7680 x 4320 pixels	Plug and Play	✓
Supported graphics resolutions	7680 x 4320	Country of origin	Netherlands
Supported video modes	4320p	Certification	FCC, CE EMI
Maximum refresh rate	60 Hz	<b>Packaging data</b>	
HDCP	✓	Weight	30 g
3D	✓	Quantity per pack	1 pc(s)
Cable length *	1 m	Package width	145 mm
Connector 1 *	Mini DisplayPort	Package depth	145 mm
Connector 2 *	DisplayPort	Package height	45 mm
Connector 1 gender *	Female	Package type	Box
Connector 2 gender *	Male	Package weight	24 g
Product colour *	Black	<b>Technical details</b>	
AWG wire size	32/28	Compliance certificates	RoHS
Data transfer rate	25.92 Gbit/s	<b>Logistics data</b>	
		Harmonized System (HS) code	84733080

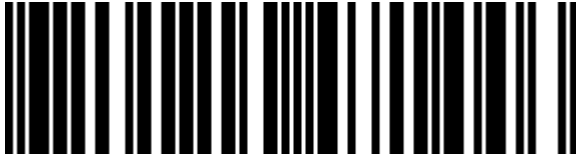

8719214471446



0841615101627



841615101627

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.