




APC Easy UPS SMV UPS-virtalähde Linjainteraktiivinen 1 kVA 700 W 6 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SMV1000CAI

Tuotteen nimi : Easy UPS SMV

APC Easy UPS SMV. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1 kVA, Lähtöteho: 700 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 6 AC-pistorasia(a).
Akkuteknologia: Sealed Lead Acid (VRLA), Akun kestoikä (maks.): 5 vuosi/vuosia, Akun latausaika: 4 h.
Kotelo: Tower, Tuotteen väri: musta, Harmaa, Näytön tyyppi: LCD. Tuotteen leveys: 160 mm, Tuotteen syvyys: 410 mm, Tuotteen korkeus: 220 mm

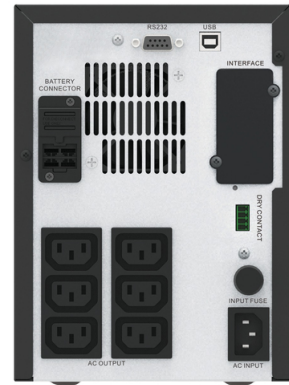


Features		Design	
UPS topology *	Line-Interactive	Product colour *	Black, Grey
Output power capacity *	1 kVA	Display type	LCD
Output power *	700 W	LED indicators	✓
Waveform *	Sine	Certification	CE
Input operation voltage (min) *	160 V	Operational conditions	
Input operation voltage (max) *	295 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	45/65 Hz	Storage temperature (T-T)	-10 - 40 °C
Output frequency	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Automatic Voltage Regulation (AVR)	✓	Storage relative humidity (H-H)	0 - 95%
Response time	2 ms	Operating altitude	0 - 3000 m
Efficiency	97.9%	Non-operating altitude	0 - 3000 m
Crest factor	3:1	Technical details	
Audible alarm(s)	✓	Compliance certificates	RoHS
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Weight & dimensions	
Ports & interfaces		Width	160 mm
AC outlet types	C13 coupler	Depth	410 mm
Power plug	C14 coupler	Height	220 mm
AC outlets quantity	6 AC outlet(s)	Weight	13.6 kg
USB port	✓	Battery width	27.2 cm
USB 2.0 ports quantity	1	Battery depth	50.8 cm
SmartSlot	✓	Battery height	33.9 cm
		Battery weight	16.6 kg

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Cables included	USB cable
Battery life (max)	5 year(s)	Logistics data	
Battery recharge time	4 h	Harmonized System (HS) code	85078000
Cold start	✓	Other features	
Design		Nominal output voltage	230 V
Form factor *	Tower	Nominal input voltage	230 V



0731304346524



731304346524

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.