




APC Easy UPS SMV UPS-virtalähde Linjainteraktiivinen 1,5 kVA 1050 W 6 AC-pistorasia(a)

Tuotemerkki : APC

Tuotekoodi: SMV1500CAI

Tuotteen nimi : Easy UPS SMV

APC Easy UPS SMV. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,5 kVA, Lähtöteho: 1050 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C14 liitin, Ulostulojen määrä: 6 AC-pistorasia(a).
Akkuteknologia: Sealed Lead Acid (VRLA), Akun kestoikä (maks.): 5 vuosi/vuosia, Akun latausaika: 4 h.
Kotelo: Tower, Tuotteen väri: musta, Harmaa, Näytön tyyppi: LCD. Tuotteen leveys: 160 mm, Tuotteen syvyys: 410 mm, Tuotteen korkeus: 220 mm

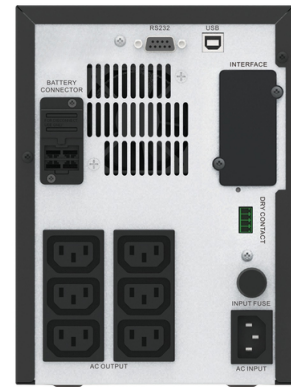

Features		Design	
UPS topology *	Line-Interactive	Form factor *	Tower
Output power capacity *	1.5 kVA	Product colour *	Black, Grey
Output power *	1050 W	Display type	LCD
Waveform *	Sine	LED indicators	✓
Input operation voltage (min) *	160 V	Certification	CE
Input operation voltage (max) *	295 V		
Input frequency *	45/65 Hz		
Output frequency	50/60 Hz		
Automatic Voltage Regulation (AVR)	✓		
Response time	2 ms		
Efficiency	98.2%		
Crest factor	3:1		
Noise level	45 dB		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm		
Ports & interfaces		Operational conditions	
AC outlet types	C13 coupler	Operating temperature (T-T)	0 - 40 °C
Power plug	C14 coupler	Storage temperature (T-T)	-10 - 40 °C
AC outlets quantity	6 AC outlet(s)	Operating relative humidity (H-H)	0 - 95%
USB port	✓	Storage relative humidity (H-H)	0 - 95%
USB 2.0 ports quantity	1	Operating altitude	0 - 3000 m
		Non-operating altitude	0 - 3000 m
		Weight & dimensions	
		Width	160 mm
		Depth	410 mm
		Height	220 mm
		Weight	17.8 kg
		Battery width	27.2 cm
		Battery depth	50.8 cm
		Battery height	33.9 cm
		Battery weight	20.8 kg
		Packaging data	

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Cables included	USB cable
Battery life (max)	5 year(s)	Manual	✓
Battery recharge time	4 h	Logistics data	
Cold start	✓	Harmonized System (HS) code	85078000
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V



0731304346531



731304346531

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.