

Epson WorkForce DS-32000



Tuotemerkki : Epson

Tuoteperhe: WorkForce

Tuotekoodi: B11B255401

Tuotteen nimi : WorkForce
DS-32000

- Suurten materiaalmäärien skannaus: 90 sivua / 180 kuvaa minuutissa ja 40 000 sivua päivässä
 - Säädettävä runko: Normaali-, vaaka- ja kompaktiasetukset takaavat sopivuuden käyttötilaasi
 - Monipuoliset materiaalit: Skannaa passit ja jopa 6 mm:n paksuiset sidotut materiaalit
 - Hallinta ja suojaus: Edistynyt paperin käsittely paperia suojaavien anturien ansiosta
 - A4- ja A3-tasoskannerivaihtoehdot: Skannaa kirjoja ja sidottua mediaa lisävarusteina saatavilla tasoskannereilla
- WorkForce DS-32000

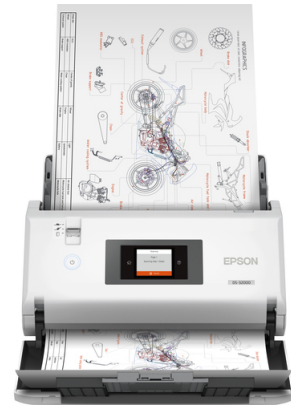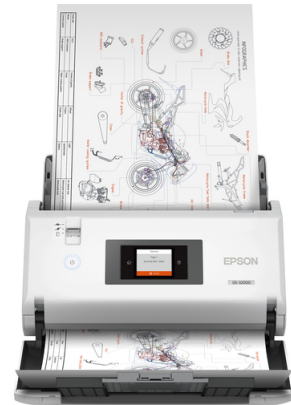

Scanning		Power	
Maximum scan size *	304.8 x 5588 mm	Power supply type *	AC
Optical scanning resolution *	600 x 600 DPI	Power consumption (typical)	20 W
Colour scanning	✓	Power consumption (standby)	11 W
Duplex scanning *	✓	Power consumption (off)	0.1 W
Input colour depth	30 bit	Sleep mode	✓
Output colour depth	24 bit	Input voltage	100 - 240 V
Input greyscale depth	10 bit	Power consumption (sleep)	1.4 W
Output greyscale depth	8 bit	Weight & dimensions	
Output monochrome depth	24 bit	Width	371 mm
ADF scan speed (b/w, A4)	90 ppm	Depth	167 mm
ADF scan speed (colour, A4)	90 ppm	Height	245 mm
Design		Weight	6.9 kg
Scanner type *	Sheet-fed scanner	Packaging data	
Product colour *	White	Quantity per pack	1 pc(s)
Display	LCD	Package width	270 mm
Display diagonal	6.86 cm (2.7")	Package depth	460 mm
Touchscreen	✓	Package height	355 mm
Colour display	✓	Package weight	8.44 kg
Built-in display *	✓	Packaging content	
Performance		Manual	✓
Sensor type *	CIS	Cables included	USB
Light source	ReadyScan LED	AC adapter included	✓

Performance		Packaging content	
Scan file formats	JPEG, PDF, TIFF	Bundled software	Epson Document Capture (Mac only), Epson Document Capture Pro (Windows only), Epson Scan 2
Daily duty cycle (max) *	40000 pages	System requirements	
Image quality improvement	Dust removal, Grain reduction, Unsharp mask, Noise reduction	Compatible operating systems	Mac OS 10.6+, Windows 10, Windows 7, Windows 8, Windows 8.1, Windows Server 2003, Windows Server 2008 (32/64 Bit), Windows Server 2012 R2, Windows Server 2016, Windows Vista, Windows XP SP3
Scan to	E-mail, Software, Print, Network folder, USB, PC	Windows operating systems supported	Windows 10, Windows 7, Windows 8, Windows 8.1, Windows Vista, Windows XP
Scan drivers	TWAIN, WIA, ISIS, SANE, ICA	Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Ultrasonic double sheet detection	✓	Server operating systems supported	Windows Server 2003, Windows Server 2008, Windows Server 2008 x64, Windows Server 2012 R2, Windows Server 2016
Ultrasonic sensor	✓	Operational conditions	
Scanning noise level	53 dB	Operating temperature (T-T)	5 - 35 °C
Sound pressure level (max)	53 dB	Storage temperature (T-T)	60 - 25 °C
Input capacity		Operating relative humidity (H-H)	15 - 80%
Auto document feeder (ADF) input capacity	120 sheets	Storage relative humidity (H-H)	15 - 85%
Paper handling		Other features	
Scanning media types supported	Plain paper, Envelopes, Post Card(JPN), Business Card, Plastic Card	Output resolutions	600 dpi
Maximum ISO A-series paper size *	A3	Image formats supported	BMP, JPEG, TIFF, PNG
ISO A-series sizes (A0...A9)	A3, A4, A5, A6, A7, A8	Logistics data	
ISO B-series sizes (B0...B9)	B4, B5, B6	Products per pallet	30 pc(s)
ISO C-series sizes (C0...C9)	C4, C5, C6	Country of origin	Indonesia
Legal	✓	Pallet gross weight	0 g
Paper tray media weight	20 - 413 g/m ²	Products per pallet (UK)	45 pc(s)
Auto Document Feeder (ADF) media weight	20 - 413 g/m ²	Pallet weight (UK)	0 g
Maximum scan area (ADF)	304.8 x 5588 mm	Harmonized System (HS) code	84716070
Minimum scan area (ADF)	50.8 x 69 mm		
Ports & interfaces			
USB port *	✓		
USB version	3.2 Gen 1 (3.1 Gen 1)		
Standard interfaces	USB, USB 3.2 Gen 1 (3.1 Gen 1)		



8715946676548

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date