

Canon imageRUNNER 2625i Laser A3 1200 x 1200 DPI 25 ppm Wi-Fi




Tuotemerkki : Canon **Tuoteperhe:** imageRUNNER **Tuotekoodi:** 3808C004
Tuotteen nimi : 2625i

Canon imageRUNNER 2625i. Tulostustekniikka: Laser, Tulostus: Yksittäistulostus, Suurin resoluutio: 1200 x 1200 DPI. Kopiointi: Yksittäiskopiointi, Kopioinnin enimmäistarkkuus: 1200 x 1200 DPI. Skannaus: Mono-skannaus, Optinen skannauserottelutarkkuus: 600 x 600 DPI. Suurin ISO A-luokan paperikoko: A3. Wi-Fi. Suoratulostus. Tuotteen väri: Harmaa



Printing		Paper handling	
Print technology *	Laser	Multi-Purpose Tray media weight	52 - 220 g/m ²
Printing *	Mono printing	Duplex media weight	60 - 105 g/m ²
Duplex printing *	✓	Ports & interfaces	
Maximum resolution *	1200 x 1200 DPI	Direct printing *	✓
Print speed (black, normal quality, A4/US Letter) *	25 ppm	USB port	✓
Print speed (black, normal quality, A3)	15 ppm	USB 2.0 ports quantity	4
Warm-up time	12 s	Network	
Warm-up time (from sleep mode)	10 s	Wi-Fi *	✓
Secure printing	✓	Ethernet LAN *	✓
Booklet printing function	✓	Cabling technology	10/100/1000Base-T(X)
Copying		Ethernet LAN data rates	10,100,1000 Mbit/s
Copying *	Mono copying	Wi-Fi standards	802.11b, 802.11g, Wi-Fi 4 (802.11n)
Maximum copy resolution *	1200 x 1200 DPI	Security algorithms	802.1x RADIUS, APOP, IPsec, SMTP-AUTH, SNMPv3
Copy speed (black, normal quality, A4)	25 cpm	Mobile printing technologies	Apple AirPrint, Canon PRINT Business, Google Cloud Print, Mopria Print Service
Copy speed (black, normal quality, A3)	15 cpm	Performance	
Time to first copy (black, normal)	5.9 s	Internal memory *	2048 MB
Maximum number of copies	9999 copies	Built-in processor	✓
Copier resize	25 - 400%	Processor cores	2
N-in-1 copy function	✓	Sound pressure level (printing)	70.2 dB
ID-card copy function	✓	Design	
Edge erase function	✓	Product colour *	Grey
Scanning		Market positioning *	Home & office
Duplex scanning *	✓	Built-in display *	✓
Scanning *	Mono scanning	Display	LCD
Optical scanning resolution *	600 x 600 DPI	Display diagonal	17.8 cm (7")
Maximum scan area	297 x 431.8 mm	Touchscreen	✓
Scanner type *	Flatbed & ADF scanner	Control type	Touch

Scanning		Design	
Scan to	Cloud, USB	Colour display	✓
Scan drivers	TWAIN, WIA	Power	
Features		Power consumption (max)	1500 W
Digital sender	✓	Power consumption (standby)	20 W
Printing colours *	Black, White	Power consumption (sleep)	0.6 W
Page description languages	PCL 6, UFR II	Power consumption (off)	0.09 W
Number of printer fonts	241	Energy Star Typical Electricity Consumption (TEC)	1.3 kWh/week
Input & output capacity		AC input voltage	220 - 240 V
Total input capacity *	1200 sheets	AC input frequency	50 - 60 Hz
Total output capacity *	250 sheets	System requirements	
Paper input type	Cassette	Windows operating systems supported	Windows 10, Windows 7, Windows 8.1
Auto document feeder (ADF)	✓		Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.9 Mavericks
Auto document feeder (ADF) input capacity	50 sheets	Mac operating systems supported	Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Maximum input capacity	2300 sheets	Server operating systems supported	
Maximum output capacity	545 sheets	Operational conditions	
Paper handling		Operating relative humidity (H-H)	20 - 80%
Maximum ISO A-series paper size *	A3	Operating temperature (T-T)	10 - 30 °C
Paper tray media types *	Plain paper, Recycled paper, Thick paper, Thin paper	Sustainability	
Multi-purpose tray media types	Bond paper, Envelopes, Labels, Plain paper, Recycled paper, Thick paper, Thin paper, Transparencies	Sustainability certificates	Blue Angel
ISO A-series sizes (A0...A9) *	A3, A4, A5	Weight & dimensions	
ISO B-series sizes (B0...B9)	B4, B5	Width	586 mm
Envelopes sizes	10, C5, DL, Monarch	Depth	713 mm
Custom media width	139.7 - 182 mm	Height	912 mm
Custom media length	297 - 431.8 mm	Weight	73.6 kg
Paper tray media weight	60 - 128 g/m ²	Logistics data	
		Harmonized System (HS) code	84433100
		Other features	
		Finishing option	✓

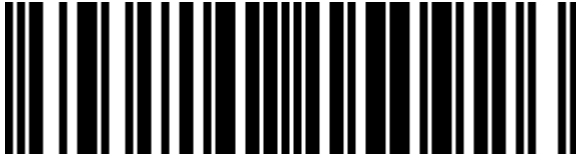

4549292150926

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.