## Epson EcoTank ET-5880 Inkjet A4 4800 x 2400 DPI 25 ppm Wi-Fi

Brand : Epson

Product family: EcoTank

Product code: C11CJ28401

Product name : ET-5880

- Ultra-low cost, 4-in-1 A4 printer: Economical ink tank system

- Fast print and scan speeds: Print up to 25 ppm and scan up to 27.5 ipm


- Easy to use front ink tank: Enjoy hassle and mess-free refills with enhanced ink bottles

- Mobile printing and connectivity: Wi-Fi, Wi-Fi Direct, Ethernet & free mobile printing apps<sup>2</sup>

- Designed for business: 2 x 250-sheet front tray, 50-sheet rear feed, 50-sheet ADF, PCL & PS3

A4, 3.8 pl, 4800 x 2400 DPI, 25 ppm, USB, Ethernet, WLAN, 10.9 cm Touchscreen, 19 W, 425 x 500 x 350 mm, 17.8 Kg

Epson EcoTank ET-5880. Print technology: Inkjet, Printing: Colour printing, Maximum resolution: 4800 x 2400 DPI, Print speed (colour, normal quality, A4/US Letter): 25 ppm. Copying: Colour copying. Scanning: Colour scanning, Optical scanning resolution: 2400 x 1200 DPI. Faxing: Colour faxing. Maximum ISO Aseries paper size: A4. Wi-Fi. Direct printing. Product colour: Black, White

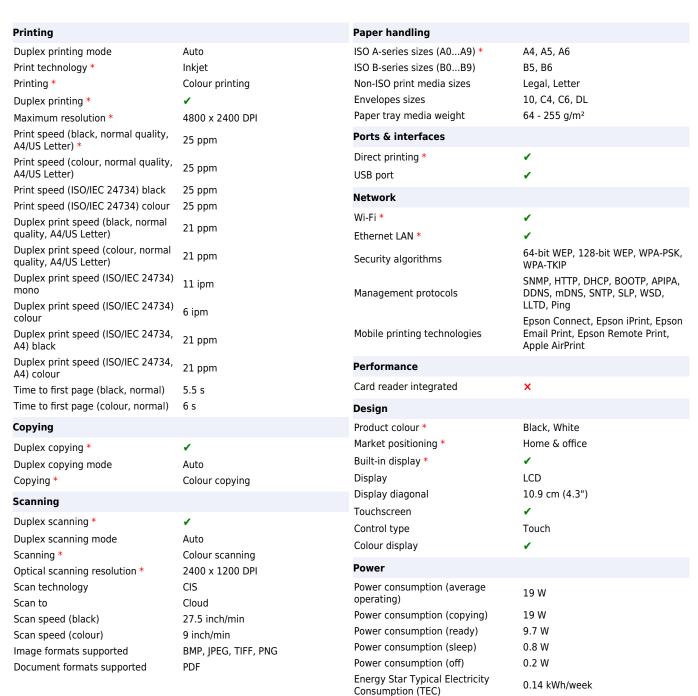


Fax		Power	
Duplex faxing	✓	AC input voltage	220 - 240 V
Faxing *	Colour faxing	AC input frequency	50 - 60 Hz
Fax transmission speed	3 sec/page	System requirements	
Modem speed Fax memory Auto-redialing Speed dialling Fax speed dialing (max numbers)	33.6 Kbit/s 180 pages ✓ 100	Windows operating systems supported	Windows 10, Windows 10 x64, Windows 7, Windows 7 x64, Windows 8, Windows 8 x64, Windows 8.1, Windows 8.1 x64, Windows Vista, Windows Vista x64, Windows XP Professional x64, Windows XP
Fax forwarding Fax forwarding to Error Correction Mode (ECM)	✔ E-mail, PC ✔	Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9
Features			
Recommended duty cycle Maximum duty cycle * Ink tank system Number of print cartridges * Printing colours *	200 - 3300 pages per month 66000 pages per month ✓ 4 Black, Cyan, Yellow, Magenta	Server operating systems supported	Mavericks Windows Server 2008 R2, Windows Server 2012 R2, Windows Server 2016, Windows Server 2003 R2, Windows Server 2003
Page description languages	PCL 3, PCL 5c, PostScript 3	Weight & dimensions	
Printer fonts	PCL, PostScript	Width	425 mm
Country of origin	Indonesia	Depth	500 mm
Input & output capacity		Height	350 mm
Total number of input trays *	3	Weight	17.8 kg
Total input capacity *	250 sheets	Packaging data	
Total output capacity *	125 sheets	Package width	560 mm
Paper tray 1 input capacity	250 sheets	Package depth	500 mm
Paper tray 2 input capacity	250 sheets	Package height	445 mm
Auto document feeder (ADF)	1	Package weight	21.2 kg
Auto document feeder (ADF) input	50 sheets	Quantity per pack	1 pc(s)
capacity Maximum input capacity	550 sheets	Packaging content	
Paper handling		Cartridge(s) included	<b>v</b>
		Cables included	AC
Maximum ISO A-series paper size *	A4 Envelopes, Diain paper	Drivers included	<i>✓</i>
Paper tray media types *	Envelopes, Plain paper	Warranty card	<ul> <li>Image: A second s</li></ul>
		Logistics data	
		Harmonized System (HS) code Pallet gross weight Products per pallet Pallet weight (UK)	84433100 0 g 8 pc(s) 0 g
		Products per pallet (UK)	16 pc(s)
		Other features	
		Printing method	Epson PrecisionCore Mac OS 10.10.x, Mac OS 10.6+, Mac OS 10.7.x, Mac OS 10.8.x, Mac OS 10.9.x, Mac OS X 10.11.x, Mac OS X 10.12.x, Mac OS X 10.13.x, Windows 10 (32/64 bit), Windows 7 (32/64 bit), Windows 8 (32/64 Bit), Windows 8.1 (32/64 bit), Windows
		Compatible operating systems	Server 2008 R2, Windows Server 2012 R2, Windows Server 2016, Windows Vista (32/64 Bit), Windows XP Professional x64 Edition SP2 or later, Windows XP SP3 or later (32- bit), Windows Server 2003 R2, Windows Server 2003 SP2 or later, Windows XP Professional x64 Edition
		Ink drop	3.8
		Fax polling	
		Print head nozzles	800 nozzles black, 800 nozzles per colour

## Other features

Supported network protocols

IPv4, IPv6



8715946676654

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.