




## APC SMTL1500RM13UC UPS-virtalähde Linjainteraktiivinen 1,5 kVA 1350 W 6 AC-pistorasia(a)

**Tuotemerkki :** APC

**Tuotekoodi:** SMTL1500RM13UC


**Tuotteen nimi :** SMTL1500RM13UC



APC SMTL1500RM13UC. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,5 kVA, Lähtöteho: 1350 W. Pistorasian tyypit: C13 liitin, Ulostulojen määrä: 6 AC-pistorasia(a), USB-portin tyyppi: USB A-tyyppi. Akkuteknologia: Litiumioni (Li-Ion), Akun kestoikä (maks.): 10 vuosi/vuosia, Akun latausaika: 3 h. Kotelo: Telineasennettava, Tuotteen väri: Harmaa, Telineen kapasiteetti: 3U. Tuotteen leveys: 438 mm, Tuotteen syvyys: 302 mm, Tuotteen korkeus: 131 mm



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Rackmount
Output power capacity *	1.5 kVA	Rack capacity	3U
Output power *	1350 W	Product colour *	Grey
Waveform *	Sine	Display type	LCD
Input operation voltage (min) *	151 V	International Protection (IP) code	IP20
Input operation voltage (max) *	302 V	Certification	CE, CSA, EAC, GS Mark, IEC 62040-1-1, IEC 62040-1-2, IEC 62040-2, RCM, UL 1973 REACH
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Output frequency	50/60 Hz		
Surge energy rating	680 J		
Response time	6 ms		
Output voltage Total Harmonic Distortion (THD)	5%		
Noise level	45 dB		
Audible alarm(s)	✓		
Audible alarm modes	Alarm when on battery		
Ports & interfaces		Operational conditions	
AC outlet types	C13 coupler	Operating temperature (T-T)	0 - 40 °C
AC outlets quantity	6 AC outlet(s)	Storage temperature (T-T)	-40 - 35 °C
USB port	✓	Operating relative humidity (H-H)	0 - 95%
USB port type	USB Type-A	Storage relative humidity (H-H)	0 - 95%
Serial interface type	RJ-45	Operating altitude	0 - 3000 m
SmartSlot	✓	Non-operating altitude	0 - 7500 m
Battery		Technical details	
Battery technology	Lithium-Ion (Li-Ion)	Compliance certificates	RoHS
Battery life (max)	10 year(s)		
Battery recharge time	3 h		
		Weight & dimensions	
		Width	438 mm
		Depth	302 mm
		Height	131 mm
		Weight	19.5 kg
		Package width	584 mm
		Package depth	448 mm
		Package height	279 mm
		Package weight	22.7 kg
		Logistics data	
		Products per pallet	12 pc(s)
		Harmonized System (HS) code	85078000

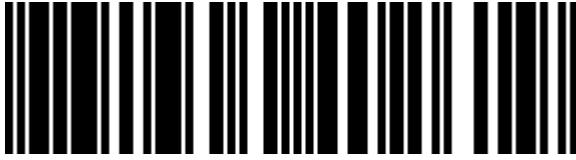

0731304402619



731304402619

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.