

B923

3MP Indoor Speed Dome with D/N, Extreme WDR, SLLS, 30x Zoom Lens



- 3 Megapixel
- Day & Night with Superior Low Light Sensitivity
- 30x Zoom Lens with f4.5-135mm/F1.6-F4.4, DC iris, Auto focus
- Extreme WDR
- Endless Pan & Tilt
- H.265 Compression
- Event trigger, response and notification

► Specifications

Device

| | |
|----------------------------------|--|
| Product Type | Speed Dome |
| Maximum Resolution | 3MP |
| Application Environment | Indoor |
| Image Sensor | Progressive Scan CMOS |
| Sensor Size | 1/2.8 " |
| Effective Pixels | 2065(H) X 1553(V) (3.21 MP) |
| Day / Night | Yes |
| Low Light Sensitivity | Superior |
| Minimum Illumination | Color: 0.1 lux at F1.6 (30 IRE , 2400 K); B/W: 0.05 lux at F1.6 (30 IRE, 2400 K) |
| Color to B/W Switch | ISP based switch, configurable |
| Mechanical IR Cut Filter | Yes |
| IR Sensitivity Range | 700-1100nm |
| IR LED | No |
| Electronic Shutter | 1/5-1/64000 second (manual mode); 1/5-1/64000 second (auto mode) |
| Horizontal Resolution (TV Lines) | 1450 TVL |
| S/N Ratio | 56 dB |

Lens

| | |
|--------------------------|---|
| Focal Length | Zoom, f4.5-135mm |
| Aperture | F1.6-F4.4 |
| Zoom Ratio | 30x optical |
| Zoom Application | Camera Installation, Auto Zoom by Event, Manual Operation |
| Iris | DC iris |
| Focus | Learning-based Auto Focus |
| Lens Mount | Board mount |
| Horizontal Viewing Angle | 58.5° - 3.2° |
| Vertical Viewing Angle | 46° - 2.4° |

PTZ

| | |
|--------------------------------|--|
| Scan Panning / Tilting Speed | 1.6° - 64°/second, 1.6° - 32°/second |
| Manual Panning / Tilting Speed | 0.16° - 54.4°/second, 0.16° - 27.2°/second |
| Preset Panning / Tilting Speed | 0.16° - 720°/second, 0.16° - 360°/second |
| Panning Range | 360° endless |
| Tilting Range | 0°~180° |
| Pan, Tilt or Zoom protocol | Visca, Pelco-D, Pelco-P, ACTi URL command |

Video

| | |
|-----------------------------------|---|
| Compression | H.265, H.264 (Baseline/ Main/ High profile), MJPEG |
| Maximum Frame Rate vs. Resolution | 30 fps at 2048 x 1536 60 fps at 1920 x 1080 (*) 30 fps at 1280 x 960 60 fps at 1280 x 720 (*) 30 fps at 800 x 600 30 fps at 640 x 480 30 fps at 320 x 240 |
| Multi-Streaming | Simultaneous triple streams based on three configurations |
| Bit Rate | 128Kbps - 12Mbps (per stream) |
| Bit Rate Mode | Constant, Variable |
| Wide Dynamic Range | Extreme WDR (145 dB) |
| Image Enhancement | White Balance, Brightness, Contrast, Saturation, Sharpness, Automatic gain control, Flickerless, Digital Image Stabilizer (DIS, EIS)*(*), Defogging |
| Digital Noise Reduction | 2D + 3D DNR |
| Privacy Mask | 32 configurable 3D privacy masks (To be available through future firmware upgrade) |
| Text Overlay | Yes |
| Built-in Analytics | Object Based Motion Detection, Tampering Detection, Shock Detection |
| Server-based Analytics | Object Line Counting, People Counting, Face Detection, Object Based Motion Detection, Tamper, Object Line Crossing Detection, Object Enter Area Detection, Missing Object Detection, Unattended Object Detection, Smoke Detection, Heat Map, Dwell Time, People Queue Detection, (Require PC-based or standalone IVS or ALPR Server. Contact ACTi support for recommendations on how to maximize analytical accuracy) |
| Image Orientation | Flip, Mirror |

Audio

| | |
|-------------------|--|
| Audio Type | 2-way, Mic-in, Line-in, Line-out |
| Audio Compression | 8 kHz, 16 bit encoding, Mono, PCM, G.711 |

Network

| | |
|----------------------------|---|
| Network Protocol & Service | IPv4/v6, TCP, UDP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, NTP, RTP, RTSP, RTCP, SMTP, FTP, IGMP, ICMP, ARP, Bonjour, UPnP, QoS, SNMP, IEEE 802.1X |
| Ethernet Port | 1 x RJ-45 connector |
| Security | IP address filtering, HTTPS encryption, Password protected user level, Anonymous login, IEEE 802.1X network access control |

Event

| | |
|----------------|---|
| Event Trigger | Video motion detection (10 regions), External device through digital input, Tampering detection, Shock Detection |
| Event Response | Notify control center, Go to PTZ preset point or preset tour, Change camera settings, Command other devices, E-mail notification with snapshots, Push notification to mobile device, Save video to local storage, Upload video to NVR server, Upload video or snapshot to FTP server, Activate external device through digital output |

Integration

| | |
|-----------------------|--------------------------------------|
| Unified Solution | Fully compatible with ACTi software |
| GPS Position | Manual setting |
| ONVIF Compliant | Yes, Profile S, Profile G, Profile Q |
| GB28181 Compliant | Yes |
| Web Browser | IE 11 |
| Auto Firmware Upgrade | Yes |

Interface


| | |
|----------------------|---|
| Local Storage | MicroSDHC, MicroSDXC memory card slot (card not included) |
| Digital Input/Output | 2/2 |

General

| | |
|-----------------------|---|
| Power Source | DC 12V, High PoE |
| Power Consumption | 25.5 W (PoE) |
| Environmental Casing | Vandal resistant (IK09) |
| Bundled Accessories | Surface mount, Power Adapter |
| Mount Type | Surface, Wall Mount, Pendant, Flush, Corner Mount, Pole Mount, Gang Box |
| Heater | Yes |
| Starting Temperature | -10°C ~ 50°C (14°F ~ 122°F) within 30 minutes |
| Operating Temperature | -20°C ~ 50°C (-4°F ~ 122°F) |
| Operating Humidity | 10% - 85% RH |
| Approvals | CE, FCC, IK09, UL (for bundled power adapter) |
| Warranty | 3 Year(s)* (1 year in continuous motion) |


* To be available through future firmware upgrade

▶ Photo Indication

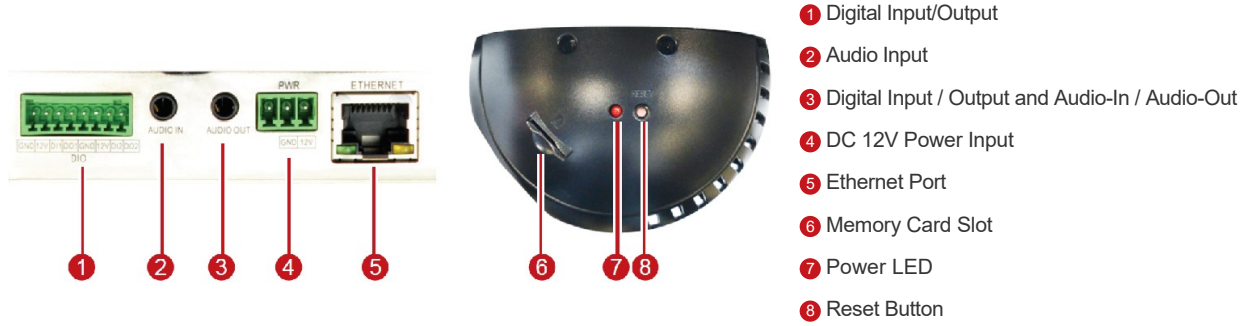

- 1 Digital Input/Output
- 2 Audio Input
- 3 Digital Input / Output and Audio-In / Audio-Out
- 4 DC 12V Power Input
- 5 Ethernet Port
- 6 Memory Card Slot
- 7 Power LED
- 8 Reset Button

▶ Dimension Diagram

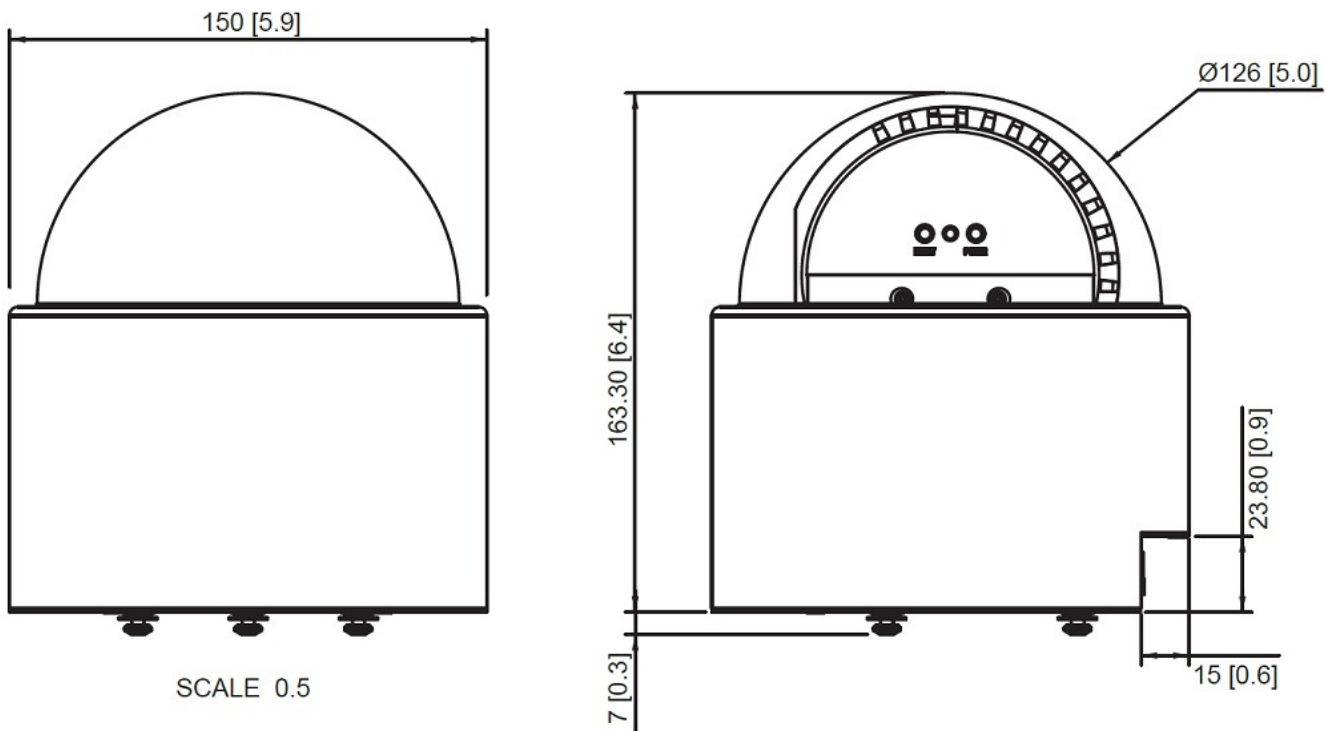














SCALE 0.5

Unit: mm [inch]

▶ Related Products

Mounting Accessories - Camera Mount


| | | |
|-----------|---|--|
| PMAX-0102 |  | Straight Tube |
| PMAX-0103 |  | Straight Tube with Bracket |
| PMAX-0104 |  | Extension Tube |
| PMAX-0110 |  | Mount Kit (for I91, I92, KCM-8111) |
| PMAX-0302 |  | Gooseneck with Bracket |
| PMAX-0303 |  | Gooseneck |
| PMAX-0305 |  | Heavy Duty Wall Mount |
| PMAX-0311 |  | L-Type Wall Mount (for I91, I92, KCM-8111) |
| PMAX-0402 |  | Corner Mount |
| PMAX-0503 |  | Pole Mount (for PMAX-0102, PMAX-0312, PMAX-0313, PMAX-0314, PMAX-0702, PMAX-1106, PMAX-1107), supports 5.25" to 8.5" Poles |
| PMAX-0702 |  | Junction Box for PTZ and Dome Cameras |
| PMAX-0807 |  | Gangbox Converter (for PMAX-0102, PMAX-0312, PMAX-0313, PMAX-0314, PMAX-0321), supports Two-Gang Boxes |
| PMAX-0808 |  | Converter Ring, 1.5" NPT for Third-Party Mounting Accessories |

Note: Some mounting accessories may need additional accessories for installation. Please check www.acti.com/mountingselector for more information.


Dome Covers - Smoked Dome Cover

| | | |
|-----------|---|--|
| PDCX-1105 |  | Smoked Dome Cover for I91, I92, I912, B913, B923, B934, KCM-8111 |
|-----------|---|--|







Power Supply Accessories - Power Adapter

| | | |
|-----------|---|--|
| PPBX-0011 |  | Power Adapter AC 100~240V, with universal connectors for all DC12V powered devices |
|-----------|---|--|


Power Supply Accessories - PoE Injector

| | | |
|-----------|---|---|
| PPOE-0101 |  | High PoE Injector IEEE 802.3at compliant, AC 100~240V, with universal connectors (for I91, I92, KCM-8111) |
|-----------|---|---|

Network & Storage Peripherals - Data Switch

| | | |
|-----------|---|--|
| PPSW-0100 |  | PLANET FGSD-910HP 8-Port 802.3at PoE Switch (PoE Budget 120W) |
| PPSW-0101 |  | PLANET GS-4210-8P2T2S 8-Port Gigabit 802.3at Managed PoE Switch (PoE Budget 240W) |
| PPSW-0102 |  | PLANET FGSD-1011HP 8-Port 802.3at PoE Switch (PoE Budget 120W) |
| PPSW-1101 |  | PLANET GS-4210-24PL4C 24-Port Gigabit 802.3at Managed PoE Switch (PoE Budget 440W) |
| PPSW-2101 |  | 4-Port 802.3at PoE Switch (PoE Budget 62W) |
| PPSW-3100 |  | PLANET FGSW-1816HPS 16-Port 802.3at PoE Switch (PoE Budget 220W) |



Extenders - PoE Extender

| | | |
|-----------|---|--|
| PPEX-0100 |  | Veracity OUTREACH Max Power over Ethernet (PoE) Extender |
|-----------|---|--|




Extenders - PoE over Coaxial Extender Kit

| | | |
|-----------|---|---|
| PPOC-0100 |  | Planet LRP-101C-KIT Power over Coax Adapter Kit |
|-----------|---|---|

Audio Devices - Microphone

| | | |
|-----------|---|---|
| PMIC-0100 |  | Active Microphone Omnidirectional for all Cameras with Line-in Audio |
| PMIC-0200 |  | Passive Microphone Omnidirectional for all Cameras with Mic-in Audio using 3.5mm Phone Jack |

Illuminators - IR LED Illuminator

| | | |
|-----------|---|--|
| PLED-0200 |  | SPINLUX (SL-A2IRXX10-24CL) IR Illuminator 10° Angle with 120 m approx. range |
| PLED-0201 |  | SPINLUX (SL-A2IRXX25-24CL) IR Illuminator 25° Angle with 50 m approx. range |
| PLED-0202 |  | SPINLUX (SL-A2IRXX35-24CL) IR Illuminator 35° Angle with 25 m approx. range |
| PLED-0204 |  | SPINLUX (SL-A2IRXX25-48CL) IR Illuminator 25° Angle with 80 m approx. range |
| PLED-0205 |  | SPINLUX (SL-A2IRXX35-48CL) IR Illuminator 35° Angle with 40 m approx. range |

Product Demo - Camera Demo Kit

| | | |
|-----------|---|---|
| PCDK-0001 |  | Camera Demo Kit Rack Box (350 x 550 x 140 mm) for all cameras except Mini Domes |
|-----------|---|---|

Installation Support - Camera Installation Kit

PMON-1001-010



Camera Installation Kit for use with iOS Device with belt bag, battery and charger (US, AC 110~240V)

PMON-1001-011



Camera Installation Kit for use with iOS Device with belt bag, battery and charger (Europe, AC 110~240V)

PMON-2000



Camera Installation Kit