


RAM® Pin-Lock™ SECURITY NUT INSTRUCTIONS

SECURITY NUT & KEY KNOB FUNCTIONS

- A. SECURITY NUT WITH Pin-Lock™ PATTERN
(PATTERNS MAY VARY)
- B. MATCHING Pin-Lock™ PATTERN ON KEY KNOB
- C. #1/2"-20 THREADED HOLE
- D. THROUGH-HOLE FOR SCREWDRIVER INSERT

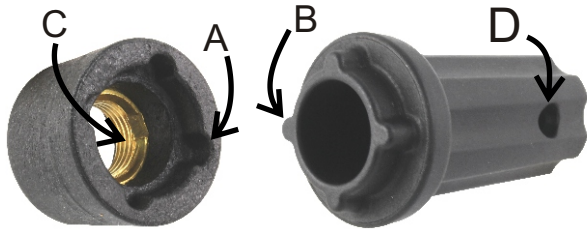

SECURITY NUT

KEY KNOB

THE RAM® Pin-Lock™ SECURITY NUT CAN BE ADDED TO ANY RAM® D-SIZE OR E-SIZE BALL AND SOCKET MOUNTING SYSTEM. AFTER COMPLETING THE FOLLOWING STEPS, YOUR RAM® MOUNT CAN BE LOOSENED AND ADJUSTED, BUT CANNOT BE REMOVED OR DISASSEMBLED WITHOUT THE USE OF THE KEY KNOB.

RAM Mounting Systems

8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com

SPARE KEY KNOBS CAN BE PURCHASED ON RAMMOUNT.COM, BY SEARCHING KEYWORD: "KEYN".

REPLACEMENT KEYS MUST MATCH SAME Pin-Lock™ PATTERN AS YOUR CURRENT SECURITY KNOB.





This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.

1. VERIFY THAT THE KNOB ON YOUR CURRENT RAM® MOUNT IS FULLY TIGHTENED.
2. POSITION SECURITY NUT OVER KEY KNOB, ALIGNING THE Pin-Lock™ PATTERNS.
3. INSERT INTO KNOB, TIGHTENING KEY KNOB BY HAND.



4. INSERT THIN SCREW DRIVER INTO (D) THROUGH-HOLE OF KEY KNOB. USE LEVERAGE OF SCREWDRIVER TO FULLY TIGHTEN.




5. ONCE FULLY TIGHTENED, LOOSEN BY TWO FULL TURNS TO ALLOW LIMITED ADJUSTABILITY OF YOUR RAM® MOUNT.

RAM® Pin-Lock™ SECURITY NUT INSTRUCTIONS

SECURITY NUT & KEY KNOB FUNCTIONS

- A. SECURITY NUT WITH Pin-Lock™ PATTERN
(PATTERNS MAY VARY)
- B. MATCHING Pin-Lock™ PATTERN ON KEY KNOB
- C. #1/2"-20 THREADED HOLE
- D. THROUGH-HOLE FOR SCREWDRIVER INSERT

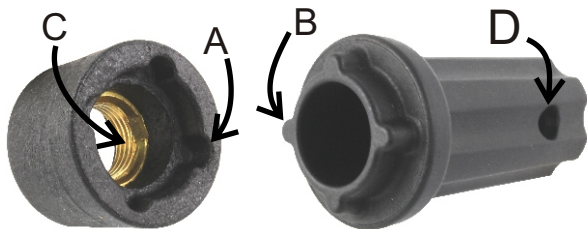

SECURITY NUT

KEY KNOB

THE RAM® Pin-Lock™ SECURITY NUT CAN BE ADDED TO ANY RAM® D-SIZE OR E-SIZE BALL AND SOCKET MOUNTING SYSTEM. AFTER COMPLETING THE FOLLOWING STEPS, YOUR RAM® MOUNT CAN BE LOOSENED AND ADJUSTED, BUT CANNOT BE REMOVED OR DISASSEMBLED WITHOUT THE USE OF THE KEY KNOB.

RAM Mounting Systems

8410 Dallas Ave S
Seattle, WA 98108
Phone: (206) 763-8361
Fax: (206) 763-9615
www.rammount.com
support@rammount.com

SPARE KEY KNOBS CAN BE PURCHASED ON RAMMOUNT.COM, BY SEARCHING KEYWORD: "KEYN".

REPLACEMENT KEYS MUST MATCH SAME Pin-Lock™ PATTERN AS YOUR CURRENT SECURITY KNOB.





This document, including images, may not be reproduced partly or fully without the expressed written consent of National Products, Inc.

1. VERIFY THAT THE KNOB ON YOUR CURRENT RAM® MOUNT IS FULLY TIGHTENED.
2. POSITION SECURITY NUT OVER KEY KNOB, ALIGNING THE Pin-Lock™ PATTERNS.
3. INSERT INTO KNOB, TIGHTENING KEY KNOB BY HAND.



4. INSERT THIN SCREW DRIVER INTO (D) THROUGH-HOLE OF KEY KNOB. USE LEVERAGE OF SCREWDRIVER TO FULLY TIGHTEN.



5. ONCE FULLY TIGHTENED, LOOSEN BY TWO FULL TURNS TO ALLOW LIMITED ADJUSTABILITY OF YOUR RAM® MOUNT.