

be quiet! DARK POWER 12 750W virtalähdeyksikkö 20+4 pin ATX ATX musta

Tuotemerkki : be quiet!

Tuotekoodi: BN314


Tuotteen nimi : DARK POWER 12 750W

be quiet! DARK POWER 12 750W. Kokonaisteho: 750 W, AC-syöttöjännite: 100 - 240 V, Huipputeho: 850 W. Emolevyn virtaliitin: 20+4 pin ATX, Emolevyn virtapiuhan pituus: 60 cm, SATA-virtakaapelin pituus: 600,750,900,1050 mm. Tarkoitus: PC, Virransyöttöyksikön mitat: ATX, 80 PLUS certification: 80 PLUS Titanium. Tuotteen väri: musta, Jäähdytyksen tyyppi: Aktiivinen, Tuulettimen halkaisija: 13,5 cm. Sisältää johdot: Prosessori (CPU), DC, PCIe, Peripheral (Molex), SATA



Power		Ports & interfaces	
Total power *	750 W	Floppy disk drive cable length	120 cm
Peak power	850 W	PCI Express connector	✓
AC input voltage *	100 - 240 V	Cabling type	Fully-Modular
AC input frequency	50 - 60 Hz	Performance	
Input current	9 - 4.5 A	80 PLUS certification *	80 PLUS Titanium
Maximum input current (@110V)	9 A	Purpose *	PC
Maximum input current (@220V)	4.5 A	Power supply unit (PSU) form factor *	ATX
Power factor	0.97	ATX version	2.52
Power Factor Correction (PFC) type	Active	EPS version	2.92
Combined power (+3.3V)	110 W	Noise level	19.6 dB
Combined power (+12V)	744 W	Bearing technology	FDB
Combined power (+5V)	110 W	Mean time between failures (MTBF)	200000 h
Combined power (-12V)	6 W	Safety	CE, CB, TÜV, FCC, cTUVus, RCM, BSMI, CU, CCC
Combined power (+5Vsb)	15 W	Certification	WEEE
Max output current (+3.3V)	22 A	Design	
Max output current (+12V)	62 A	Product colour	Black
Max output current (+12V1)	25 A	Cooling type	Active
Max output current (+12V2)	25 A	Fan diameter	13.5 cm
Max output current (+12V3)	30 A	Number of fans	1 fan(s)
Max output current (+12V4)	30 A	On/off switch	✓
Max output current (+5V)	22 A	Operational conditions	
Max output current (-12V)	0.5 A	Operating temperature (T-T)	0 - 40 °C
Max output current (+5Vsb)	3 A	Packaging content	
Hold time	20.2 ms	Cables included	CPU, DC, PCIe, Peripheral (Molex), SATA
Efficiency	93.8%	Weight & dimensions	
Power protection features	Over current, Over power, Over voltage, Overheating, Short circuit, Under voltage	Width	150 mm
Ports & interfaces		Depth	175 mm
Motherboard power connector *	20+4 pin ATX	Height	86 mm
Motherboard power cable length	60 cm	Weight	1.96 kg
Number of SATA power connectors	12		
SATA power cable length	600,750,900,1050 mm		
Peripheral (Molex) power connectors (4-pin) *	5		

Ports & interfaces		Packaging data	
Peripheral (Molex) power cable length	1050,600,750,900 mm	Package width	350 mm
EPS power connector (8-pin)	✓	Package depth	270 mm
EPS power connector (4+4 pin)	✓	Package height	120 mm
PCI Express power connectors (6+2 pin)	6	Package weight	4.18 kg
PCI Express power cable length	60 cm	Package type	Box
ATX power connector (20+4 pin)	✓	Technical details	
Floppy disk drive connector	✓	Sustainability compliance	✓
		Sustainability certificates	ENERGY STAR, ErP
		Compliance certificates	RoHS
		Logistics data	
		Shipping (inner) case length	50.4 cm
		Shipping (inner) case width	30.5 cm
		Shipping (inner) case height	36.8 cm
		Products per shipping (inner) case	4 pc(s)
		Shipping (inner) case gross weight	18.1 kg
		Harmonized System (HS) code	84733020

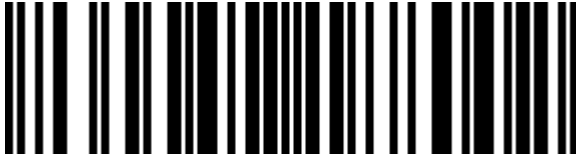

4260052188002

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date