



## APC Easy UPS SRV RM 6000VA 230V UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 6 kVA 6000 W

**Tuotemerkki :** APC

**Tuotekoodi:** SRV6KRILRK

**Tuotteen nimi :** Easy UPS SRV RM 6000VA 230V




APC Easy UPS SRV RM 6000VA 230V. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 6 kVA, Lähtöteho: 6000 W. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 240 V, Akun kestoikä (maks.): 5 vuosi/vuosia. Kotelo: Telineasennettava, Tuotteen väri: musta, Telineen kapasiteetti: 5U. Tuotteen leveys: 438 mm, Tuotteen syvyys: 615 mm, Tuotteen korkeus: 220 mm. Sisältää johdot: RS-232, USB-kaapeli

Features		Battery	
UPS topology *	Double-conversion (Online)	Battery life (max)	5 year(s)
Output power capacity *	6 kVA	Battery recharge time	9 h
Output power *	6000 W	Hot-swap battery	✓
Waveform *	Pure sine	<b>Design</b>	
Input operation voltage (min) *	110 V	Form factor *	Rackmount
Input operation voltage (max) *	300 V	Rack capacity	5U
Input frequency *	40/70 Hz	Product colour *	Black
Output operation voltage (min)	220 V	Display type	LCD
Output operation voltage (max)	240 V	International Protection (IP) code	IP20
Output frequency	50/60 Hz	Certification	CE, UKCA, EAC, TISI
Surge energy rating	600 J	<b>Operational conditions</b>	
Efficiency	94%	Operating temperature (T-T)	0 - 40 °C
Crest factor	3:1	Storage temperature (T-T)	-15 - 60 °C
Output voltage Total Harmonic Distortion (THD)	1%	Operating relative humidity (H-H)	0 - 95%
Noise level	55 dB	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3000 m
Audible alarm(s)	✓	Non-operating altitude	0 - 15000 m
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	<b>Weight &amp; dimensions</b>	
Auto shut-off	✓	Width	438 mm
Power source type	AC	Depth	615 mm
Detachable power cord	✓	Height	220 mm
<b>Ports &amp; interfaces</b>		Weight	78 kg
USB port	✓	<b>Packaging data</b>	
<b>Battery</b>		Rack mount kit	✓
Battery technology	Sealed Lead Acid (VRLA)	Cables included	RS-232, USB cable
Battery voltage	240 V	Manual	✓
		<b>Logistics data</b>	
		Harmonized System (HS) code	85078000




0731304346289



731304346289



8592978245146

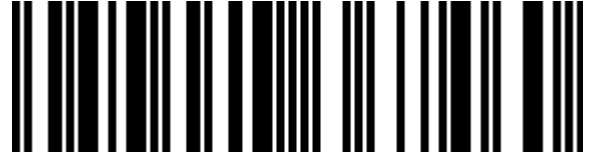

5054444367460



5715063303221

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.