


# Delock Riser Card PCI Express x1 > 4 x PCIe x16 with 60 cm USB cable

## Description

The PCI Express riser card by Delock can be plugged into any PCI Express x1 slot on the motherboard. The PCI Express board can be mounted in a different position in the case. This allows up to four graphics cards to be operated in each PCIe slot of a motherboard, even if the graphics cards are wider than a single slot. By using several riser cards, several graphics cards can be operated simultaneously on one motherboard, e.g. for mining crypto currencies such as Bitcoin, Ethereum or Zcash.

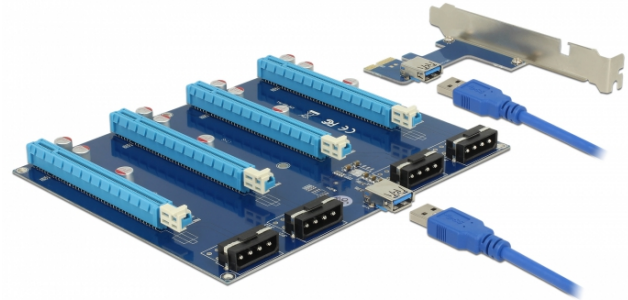

## Note

The package content includes a USB 3.0 riser cable with a length of 60 cm. No USB signals are transmitted through this cable, therefore it is not possible to exchange it with a different or longer cable.

## Special features

Four PCIe x16 graphics cards can be used with a PCIe x1 slot.

## Specification

- Connectors:
  - Motherboard side:
    - 1 x PCI Express x1
    - 1 x USB 3.0 Type-A female
  - Riser side:
    - 4 x PCI Express x16 slot
    - 1 x USB 3.0 Type-A female
    - 4 x Molex 4 pin power plug
- Chipset: Asmedia ASM1184e
- Data transfer rate up to 800 MB/s
- FP solid capacitors, ensures secure power supply of the graphics card
- 6 x mounting holes on the riser card
- Cable data:
  - 1 x riser cable USB 3.0 Type-A male to male ca. 60 cm (incl. connectors)
  - 2 x power cable 6 pin to SATA ca. 20 cm (incl. connectors)
- Dimensions of the riser card (LxWxH): ca. 175 x 142 x 14 mm

## System requirements

- PC with one free PCI Express x1 / x4 / x8 / x16 / x32 slot
- Power supply with free SATA power connectors

## Package content

- PCIe to USB riser card
- USB to PCIe riser card
- 1 x USB 3.0 cable
- 2 x Power cable

## Item no. 41427

EAN: 4043619414277

Country of origin: China

Package: Retail Box



Images



**General**

Supported operating system: OS independent, no driver installation necessary

**Interface**

connector 1:	1 x PCI Express x1
connector 2:	2 x USB 3.0 Type-A female
connector 3:	4 x PCI Express x16 slot
connector 4:	4 x Molex 4 pin power plug