

## be quiet! BN229 virtalähdeyksikkö 300 W 20+4 pin ATX TFX musta

**Tuotemerkki** : be quiet!


**Tuotekoodi**: BN229

**Tuotteen nimi** : BN229

be quiet! BN229. Kokonaisteho: 300 W, AC-syöttöjännite: 110 - 240 V, Huipputeho: 330 W. Emolevyn virtaliitin: 20+4 pin ATX, Kaapelointityyppi: Ei-modulaarinen. Tarkoitus: PC, Virransyöttöyksikön mitat: TFX, 80 PLUS certification: 80 PLUS Gold. Tuotteen väri: musta, Jäähdytyksen tyyppi: Aktiivinen, Tuulettimen halkaisija: 8 cm. Tuotteen leveys: 85 mm, Tuotteen syvyys: 185 mm, Tuotteen korkeus: 65 mm



Power		Performance	
Total power *	300 W	Purpose *	PC
Peak power	330 W	Power supply unit (PSU) form factor *	TFX
AC input voltage *	110 - 240 V	Noise level	26.5 dB
AC input frequency	50 - 60 Hz	Mean time between failures (MTBF)	100000 h
Input current	4 A	Certification	CE, CB, TÜV
Maximum input current (@110V)	+12V1,+12V2,+3.3V,+5V,+5Vsb,-12V	Design	
Power factor	0.9	Product colour	Black
Power Factor Correction (PFC) type	Active	Cooling type	Active
Combined power (+3.3V)	103 W	Fan diameter	8 cm
Combined power (+12V)	264 W	Number of fans	1 fan(s)
Combined power (+5V)	103 W	Fan speed	2003
Combined power (-12V)	3.6 W	Operational conditions	
Combined power (+5Vsb)	15 W	Operating temperature (T-T)	0 - 40 °C
Max output current (+3.3V)	21 A	Weight & dimensions	
Max output current (+12V1)	13 A	Width	85 mm
Max output current (+12V2)	13 A	Depth	185 mm
Max output current (+5V)	15 A	Height	65 mm
Max output current (-12V)	0.3 A	Weight	1.2 kg
Max output current (+5Vsb)	2 A	Packaging data	
Hold time	16 ms	Manual	✓
Efficiency	91.6%	Package width	190 mm
Power protection features	Over current, Over power, Over voltage, Short circuit, Under voltage	Package depth	85 mm
		Package height	159 mm
		Package weight	1.5 kg
Ports & interfaces		Technical details	
Motherboard power connector *	20+4 pin ATX	Sustainability certificates	ENERGY STAR
Number of SATA power connectors	4	Compliance certificates	RoHS
Peripheral (Molex) power connectors (4-pin) *	2	Other features	
CPU P4 connector (4-pin)	1	Noise level (silent mode, <30%)	12.7 dB
Floppy drive power connector	1	Noise level (quiet mode, 50%)	14.5 dB
Floppy disk drive connector	✓	Noise level (full-load mode, 100%)	26.5 dB
Cabling type	Non-Modular	Warranty card	✓
Performance			
80 PLUS certification *	80 PLUS Gold		

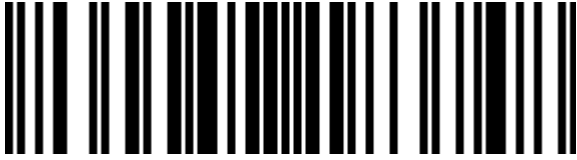

4260052183748

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 22-DEC-2024. Prints or copies of Information are only valid on the printed Publication date