


Delock PCI Express x4 Card > 1 x internal M.2 Key B + 1 x internal NVMe M.2 Key M - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. One M.2 SATA module can be connected in format 22110, 2280, 2260, 2242, 2230 with this card and connected via SATA cable to the motherboard. Additionally, one M.2 PCIe module in format 22110, 2280, 2260, 2242, 2230 can be connected. Both slots can be used at the same time.

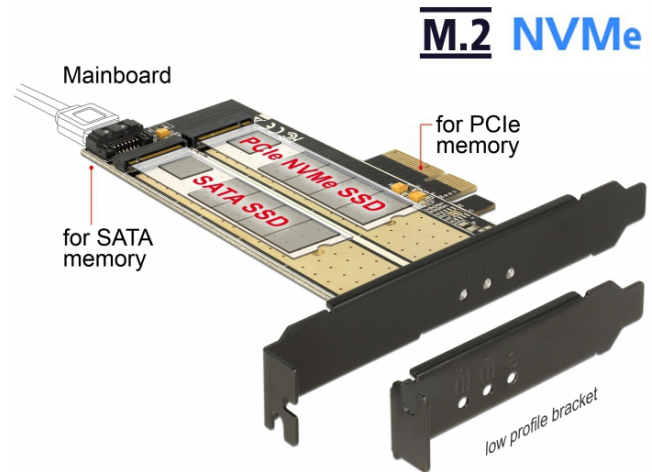

Specification

- Connectors:
 - internal:
 - 1 x 67 pin M.2 key B slot
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x4
 - 1 x SATA 6 Gb/s 7 pin plug
- Interface: SATA / PCIe (2 or 4 lanes)
- Supports one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and one M.2 module in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- 3 x LED indicator
- Bootable
- Supports NVM Express (NVMe)

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 1 x Heat sink
- 2 x fixing screw for M.2 module
- 5 x self-adhesive thermal pad
- User manual

Item no. 89630





EAN: 4043619896301

Country of origin: China

Package: Retail Box



Images



General	
Function:	NVM Express (NVMe) bootable
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	3 x
Slot:	PCIe SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	1 x 67 pin M.2 key B slot 1 x 67 pin M.2 key M slot 1 x SATA 6 Gb/s 7 pin plug 1 x PCI Express x4
Physical characteristics	
Slot bracket:	low profile standard