



## APC BVX900LI-GR UPS-virtalähde Linjainteraktiivinen 0,9 kVA 480 W 2 AC-pistorasia(a)

**Tuotemerkki :** APC

**Tuotekoodi:** BVX900LI-GR


**Tuotteen nimi :** BVX900LI-GR

APC BVX900LI-GR. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 0,9 kVA, Lähtöteho: 480 W. Pistorasian tyypit: Tyyppi F, Virtapistoke: Tyyppi F, Ulostulojen määrä: 2 AC-pistorasia(a). Akkuteknologia: Sealed Lead Acid (VRLA), Akun kapasiteetti: 9 ah, Akun jännite: 12 V. Kotelo: Kompakti, Tuotteen väri: musta, International Protection (IP)-koodi: IP20. Tuotteen leveys: 120 mm, Tuotteen syvyys: 355 mm, Tuotteen korkeus: 160 mm



Features		Battery	
UPS topology *	Line-Interactive	Battery voltage	12 V
Output power capacity *	0.9 kVA	Battery life (max)	2 year(s)
Output power *	480 W	Battery recharge time	8 h
Waveform *	Sine	Cold start	✓
Input operation voltage (min) *	170 V	<b>Design</b>	
Input operation voltage (max) *	280 V	Form factor *	Compact
Input frequency *	50/60 Hz	Product colour *	Black
Output operation voltage (min)	230 V	LED indicators	✓
Output operation voltage (max)	230 V	International Protection (IP) code	IP20
Output frequency	50/60 Hz	Certification	CB, CE, EN/IEC 62040-1, EN/IEC 62040-2
Output frequency regulation	0.5 Hz	<b>Operational conditions</b>	
Output voltage regulation	10%	Operating temperature (T-T)	0 - 40 °C
Automatic Voltage Regulation (AVR) ✓		Storage temperature (T-T)	-15 - 40 °C
Surge energy rating	273 J	Operating relative humidity (H-H)	0 - 95%
Response time	6 ms	Operating altitude	0 - 3000 m
Input power factor	0.53	Non-operating altitude	0 - 3000 m
Noise level	40 dB	<b>Weight &amp; dimensions</b>	
Surge protection ✓		Width	120 mm
Audible alarm(s) ✓		Depth	355 mm
Audible alarm modes	Alarm when on battery, Battery replacement, Low battery alarm, Overload alarm	Height	160 mm
<b>Ports &amp; interfaces</b>		Weight	6 kg
AC outlet types	Type F	Package width	197 mm
Power plug	Type F	Package depth	430 mm
AC outlets quantity	2 AC outlet(s)	Package height	250 mm

<b>Battery</b>		<b>Weight &amp; dimensions</b>	
Battery technology	Sealed Lead Acid (VRLA)	Package weight	6.5 kg
Battery capacity	9 Ah	<b>Packaging data</b>	
		Cables included	Input power cable
		Manual	✓
		<b>Logistics data</b>	
		Harmonized System (HS) code	85078000

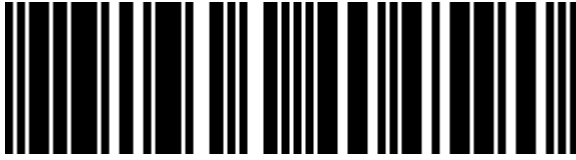

0731304404590



731304404590

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.