

## D-Link AC2300 1700 Mbit/s Valkoinen Power over Ethernet -tuki

**Tuotemerkki :** D-Link

**Tuotekoodi:** DAP-2682

**Tuotteen nimi :** AC2300

D-Link AC2300. 2,4 GHz, 5 GHz, Tiedonsiirron enimmäisnopeus: 1700 Mbit/s. Tietoturva-algoritmit: 64-bit WEP, 128-bit WEP, WPA2. Ethernet LAN -datanopeudet: 10,100,1000 Mbit/s. Power over Ethernet -tuki. Tuotteen väri: Valkoinen. Tehonkulutus (maks.): 15,5 W



Features		Management features	
2.4 GHz *	✓	Web-based management	✓
5 GHz *	✓	<b>Ports &amp; interfaces</b>	
Maximum data transfer rate *	1700 Mbit/s	Ethernet LAN (RJ-45) ports *	2
Maximum data transfer rate (2.4 GHz)	600 Mbit/s	<b>Power</b>	
Maximum data transfer rate (5 GHz)	1700 Mbit/s	Power over Ethernet (PoE) *	✓
Ethernet LAN data rates	10,100,1000 Mbit/s	AC input voltage	12 V
Frequency band	2.4 - 5 GHz	Input current	2.5 A
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u	Power consumption (max)	15.5 W
		<b>Design</b>	
Cabling technology	10/100/1000Base-T(X)	Placement *	Ceiling, Wall
MIMO	✓	Product colour *	White
MIMO type	Multi User MIMO	LED indicators	Power, Status
Wi-Fi Multimedia (WMM)/(WME)	✓	<b>Antenna</b>	
VLAN support	✓	Antenna type *	Internal
Virtual LAN features	Multiple VXLAN (MUX VLAN)	Antenna gain level (max)	4.8 dBi
Quality of Service (QoS) support	✓	<b>Certificates</b>	
Mean time between failures (MTBF)	341897 h	Certification	FCC, CE, UL
<b>Security</b>		<b>Weight &amp; dimensions</b>	
Security algorithms *	64-bit WEP, 128-bit WEP, WPA2	Width	190 mm
MAC address filtering	✓	Depth	190 mm
Service Set Identifier (SSID) features	SSID broadcast	Height	43.7 mm
Number of SSID supported	16	Weight	551.6 g
		<b>Operational conditions</b>	
		Operating relative humidity (H-H)	10 - 90%

Security		Operational conditions	
Auto Wireless Distribution System (WDS)	✓	Operating temperature (T-T)	0 - 40 °C
Remote Authentication Dial-In User Service (RADIUS)	✓	Storage temperature (T-T)	-20 - 65 °C
		Storage relative humidity (H-H)	5 - 95%
Protocols		Logistics data	
Management protocols	Telnet, SSH	Harmonized System (HS) code	85176990



0790069454165




790069454165



0790069443756



790069443756

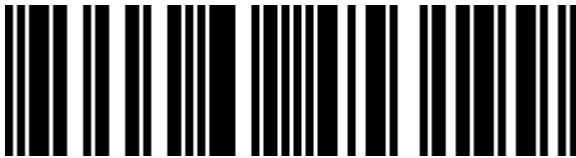

0790069453199



790069453199

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.