



# LG 86UL3J-B infonäyttö Digitaalinen litteä infotaulu 2,18 m (86") IPS Wi-Fi 330 cd/m<sup>2</sup> 4K Ultra HD Sininen Sisäänrakennettu prosessori WebOS 16/7



Tuotemerkki : LG


Tuotekoodi: 86UL3J-B

Tuotteen nimi : 86UL3J-B

LG 86UL3J-B. Tuotteen muotoilu: Digitaalinen litteä infotaulu. Näytön halkaisija: 2,18 m (86"), Näytön teknologia: IPS, Näytön erottelutarkkuus: 3840 x 2160 pikseliä, Näytön kirkkaus: 330 cd/m<sup>2</sup>, HD-tyyppi: 4K Ultra HD. Wi-Fi. Toiminta-aika (tunteja/päiviä): 16/7. Käyttöjärjestelmä asennettu: WebOS. Tuotteen väri: Sininen




Display		Performance	
Display diagonal *	2.18 m (86")	Purpose *	Universal
Display technology *	IPS	Operating hours (hours/days)	16/7
Display resolution *	3840 x 2160 pixels	HDCP	✓
Display brightness *	330 cd/m <sup>2</sup>	HDCP version	1.4/2.2
HD type *	4K Ultra HD	<b>Power</b>	
Touchscreen *	✗	Power consumption (typical) *	220 W
Response time	5 ms	AC input voltage	100-240 V
Contrast ratio (typical)	1200:1	AC input frequency	50 - 60 Hz
Contrast ratio (dynamic)	1000000:1	Heat dissipation	751 BTU/h
Viewing angle, horizontal	178°	<b>Computer system</b>	
Viewing angle, vertical	178°	Computer system *	✓
Display number of colours	1.07 billion colours	Built-in processor *	✓
<b>Ports &amp; interfaces</b>		Operating system installed	WebOS
HDMI ports quantity *	3	<b>Weight &amp; dimensions</b>	
DVI port *	✗	Display width	1927 mm
USB port *	✓	Display depth	59.9 mm
USB ports quantity	2	Display height	1104 mm
USB version	2.0	Display weight	45.2 kg
Ethernet LAN *	✓	<b>Packaging data</b>	
Wi-Fi *	✓	Package width	2115 mm
RS-232C	✓	Package depth	228 mm
<b>Audio</b>		Package height	1215 mm
Built-in speaker(s) *	✓	<b>Packaging content</b>	
<b>Design</b>		Remote control included	✓
Product design *	Digital signage flat panel	Batteries included	✓
Placement supported *	Indoor	Cables included	AC
Orientation	Horizontal/Vertical	<b>Operational conditions</b>	
Product colour *	Blue	Operating temperature (T-T)	0 - 40 °C
VESA mounting *	✓	Operating relative humidity (H-H)	10 - 80%
Panel mounting interface	600 x 400 mm	<b>Logistics data</b>	
		Harmonized System (HS) code	85285210

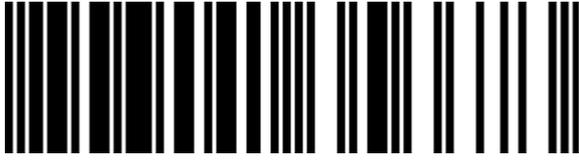

8806091356673



0195174012895



195174012895

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.