



APC SRTG20KXLI UPS-virtalähde Taajuuden kaksoismuunnos (verkossa) 20 kVA 20000 W

Tuotemerkki : APC

Tuotekoodi: SRTG20KXLI

Tuotteen nimi : SRTG20KXLI

APC SRTG20KXLI. UPS topologia: Taajuuden kaksoismuunnos (verkossa), Kokonaislähtöteho (VA): 20 kVA, Lähtöteho: 20000 W. Sarjaliitännän tyyppi: RS-232. Akkuteknologia: Sealed Lead Acid (VRLA), Akun jännite: 192 V, Akun kestoikä (maks.): 5 vuosi/vuosia. Kotelo: Telineasennettava/Torni, Tuotteen väri: musta, Näytön tyyppi: LCD. Tuotteen leveys: 440 mm, Tuotteen syvyys: 700 mm, Tuotteen korkeus: 306 mm



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery voltage	192 V
Output power capacity *	20 kVA	Battery life (max)	5 year(s)
Output power *	20000 W	Battery recharge time	4 h
Waveform *	Sine	Cold start	✓
Input operation voltage (min) *	160 V	Design	
Input operation voltage (max) *	415 V	Form factor *	Rackmount/Tower
Input frequency *	40/70 Hz	Product colour *	Black
Output operation voltage (max)	230 V	Display type	LCD
Output frequency	50/60 Hz	LED indicators	✓
Output frequency regulation	0.1 Hz	International Protection (IP) code	IP20
Maximum current	87 A	Operational conditions	
Number of output phases	3	Operating temperature (T-T)	0 - 40 °C
Efficiency	93%	Storage temperature (T-T)	-15 - 45 °C
Crest factor	3:1	Operating relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Storage relative humidity (H-H)	0 - 95%
Input current Total Harmonic Distortion (THD)	5%	Operating altitude	0 - 2011.68 m
Noise level	58 dB	Non-operating altitude	0 - 15240 m
Surge protection	✓	Weight & dimensions	
Audible alarm(s)	✓	Width	440 mm
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Depth	700 mm
Auto-restart	✓	Height	306 mm
Ports & interfaces		Weight	142.5 kg
USB port	✓	Package width	590 mm
Serial interface	✓	Package depth	790 mm
Serial interface type	RS-232	Package height	535 mm
SmartSlot	✓	Packaging data	
		Cables included	RS-232

Battery


Battery technology

Sealed Lead Acid (VRLA)

Logistics data

Harmonized System (HS) code

85078000

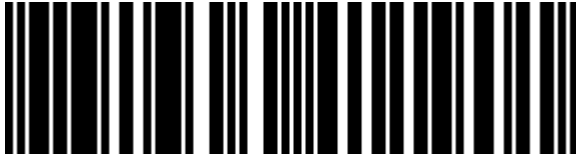

0731304411901



731304411901

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 25-NOV-2024. Prints or copies of Information are only valid on the printed Publication date