

ECD-200


16-Channel Megapixel H.265 Video Decoder




- Special media display station for large TV panels away from video control room
- Support up to 16 channels
- Supports all ACTi cameras in all resolution
- HDMI output with 1080p resolution
- Easy Installation with surface, VESA or pole mount
- USB port for mouse control
- ONVIF Support

PHOTO INDICATION

DIMENSION DIAGRAM

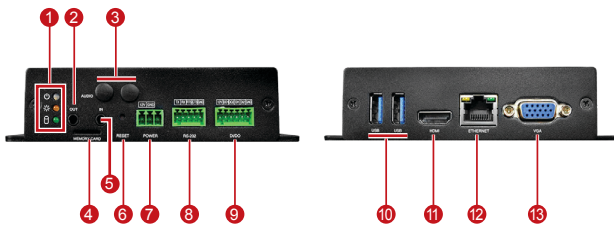

- | | |
|--|---|
| <ul style="list-style-type: none"> ① LED Indicators (Power, System, HDD) ② Audio Output ③ Antenna Socket ④ Memory Card Slot ⑤ Audio Input ⑥ Reset Button | <ul style="list-style-type: none"> ⑦ DC 12V Power Input ⑧ Serial Connector ⑨ Digital Input / Output ⑩ USB 3.0 (2) ⑪ HDMI Port ⑫ Ethernet Port ⑬ VGA Port |
|--|---|

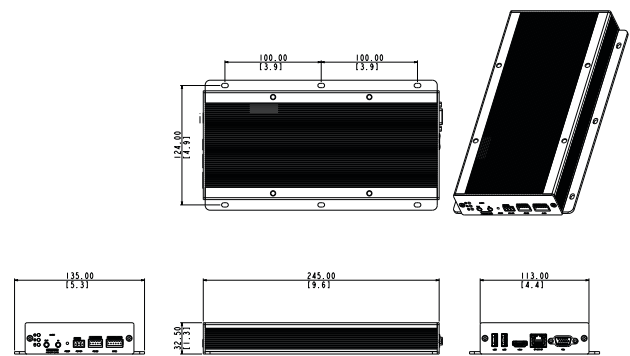

Unit: mm [inch]

PRODUCT SPECIFICATION**ECD-200****• General**

Product Type	Video Decoder
Maximum Resolution	Support all ACTi Cameras in all Resolution
Number of Video Devices	16
Maximum Number of Clients	Local: 1, Remote: 2
Maximum Display Resolution	1080p

• Hardware

CPU	Hi3536
RAM	4 GB

• License

License Required	No
Free License	16

• Live View

Display Layout Mode	Custom Grid Layout
Digital Zoom	Yes
Event Status	Network Loss, Motion, DI

• PTZ

PTZ Control	Yes
-------------	-----

• Network

Protocol & Service	TCP, UDP, IP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP
Ethernet Port	1, Ethernet (1000 Base-T), RJ-45 connector

• Event

Event Trigger	Network Loss, Video Loss, Video Analytics
Event Response	Show Event on Local Display, Play Sound on HDMI Display

• System

Client PC Operating System	Windows 10, Windows 8.1, Windows 7 SP1, Windows Server 2012 R2, Windows Server 2008 R2 SP1
Server Operating System	Embedded Linux
USB	2 x USB 3.0
Language	Multi-Language

• Interface

HDMI Output	1, HDMI Type A
Serial Port	1 x RS-232
Wireless	1x mini-PCIe slot for optional Wireless module such as Wi-Fi (IEEE802.11b/g/n)
Local Storage	MicroSDHC, MicroSDXC memory card slot (card not included)
Digital Input / Output	2/2, Terminal Block
Local Access	USB Keyboard and Mouse
Local Display Interface	1 x HDMI, 1 x VGA

• Storage

HDD Bay	SATA, Max. 1 Disk (without storage disks; function will be available upon request)
HDD Size	2.5"

• General

Power Source	DC 12V
Weight	566 g (1.25 lb)
Dimensions (W x H x D)	135 mm x 32.5 mm x 245 mm (5.3" x 1.3" x 9.6")
Bundled Accessories	Pole Mount, Power Adapter
Mount Type	Surface, Pole, VESA Mount (10 cm x 10 cm)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% ~ 85% RH
Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B)

• Integration

Unified Solution	Fully compatible with ACTi cameras and encoders, central management system, TV wall and intelligent video surveillance software
ONVIF Compliant	Yes, Profile S
Web Browser	Microsoft Internet Explorer 11