

D-Link DGS-1210-26 verkkokytkin Hallittu L2 Gigabit Ethernet (10/100/1000) 1U musta, Harmaa



Tuotemerkki : D-Link

Tuotekoodi: DGS-1210-26

Tuotteen nimi : DGS-1210-26

D-Link DGS-1210-26. Kytkin tyyppi: Hallittu, Kytinkerros: L2. Peruskytkentä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytkentä RJ-45 Ethernet-porttien määrä: 24, Console-portti: RJ-45. MAC-osoitetaulukko: 8000 entries, Kytkentäkapasiteetti: 52 Gbit/s. Verkkostandardit: IEEE 802.1D, IEEE 802.1Q, IEEE 802.1p, IEEE 802.1s, IEEE 802.1v, IEEE 802.1w, IEEE 802.1x, IEEE.... Telineasennus, Kotelo: 1U

Management features		Performance	
Switch type *	Managed	Memory type	DDR3-SDRAM
Switch layer	L2	Internal memory	128 MB
Quality of Service (QoS) support	✓	Flash memory	32 MB
Web-based management	✓	Mean time between failures (MTBF)	1082534 h
Traffic classification	✓	Power	
System event log	✓	AC input voltage	100 - 240 V
MIB support	RFC1213MIB II, RFC1493, RFC1907, RFC1757, 2819, RFC2021, RFC1398, 1643, 1650, 2358, 2665, RFC2674, 4363, RFC 2233, 2863, RFC 2618, RFC 2620, RFC 2925	AC input frequency	50 - 60 Hz
		Power consumption (typical)	15.11 W
Ports & interfaces		Power over Ethernet (PoE)	
Basic switching RJ-45 Ethernet ports quantity *	24	Power over Ethernet (PoE) *	✗
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Operational conditions	
SFP module slots quantity	2	Operating temperature (T-T)	-5 - 50 °C
Console port	RJ-45	Storage temperature (T-T)	-40 - 70 °C
Network		Operating relative humidity (H-H)	10 - 90%
Networking standards *	IEEE 802.1D, IEEE 802.1Q, IEEE 802.1p, IEEE 802.1s, IEEE 802.1v, IEEE 802.1w, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3ah, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Storage relative humidity (H-H)	5 - 90%
10G support *	✓	Heat dissipation	51.57 BTU/h
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Weight & dimensions	
Port mirroring	✓	Width	440 mm
IP routing	✓	Depth	140 mm
Flow control support	✓	Height	44 mm
Link aggregation	✓	Weight	2.06 kg
Broadcast storm control	✓	Packaging data	
Rate limiting	✓	Package width	249 mm
Auto MDI/MDI-X	✓	Package depth	493 mm
Spanning tree protocol	✓	Package height	72 mm
Auto-negotiation	✓	Package weight	3.13 kg
VLAN support	✓	Technical details	
Virtual LAN features	Tagged VLAN, Port-based VLAN	Shipping (inner) case height	28.2 cm
Data transmission		Shipping (inner) case width	38.1 cm
Switching capacity *	52 Gbit/s	Shipping (inner) case length	51 cm
Throughput	38.7 Mpps	Shipping (inner) case net weight	15.7 kg
		Products per shipping (inner) case	5 pc(s)
		Pallet gross weight (air)	422.4 kg
		Master (outer) cases per pallet (air)	24 pc(s)
		Products per pallet (air)	120 pc(s)
		Pallet gross length	110 cm
		Pallet gross width	120 cm
		Pallet height (air)	130.3 cm
		Pallet gross weight (sea)	621.3 kg

Data transmission		Technical details	
MAC address table *	8000 entries	Master (outer) cases per pallet (sea)	36 pc(s)
Security		Products per pallet (sea)	180 pc(s)
DHCP features	DHCP server, DHCP client	Pallet height (sea)	188.7 cm
Access Control List (ACL)	✓	Shipping (inner) case gross weight	16.5 kg
IGMP snooping	✓	Certificates	
Security algorithms	802.1x RADIUS, SNMP, SSH	Certification	IEC61000-4-5, RoHS
SSH/SSL support	✓	Logistics data	
Loop protection	✓	Harmonized System (HS) code	85176990
BPDU filtering/protection	✓		
Multicast features			
Multicast support	✓		
Design			
Rack mounting *	✓		
Stackable *	✓		
Form factor	1U		
Product colour	Black, Grey		
LED indicators	Activity, Fan fail, Link, Power, Speed		
Number of fans	2 fan(s)		
Safety	CCC, CE LVD, UL/cUL		
Electromagnetic compatibility	FCC A, CE A, VCCI, C-Tick, BSMI, CCC		



0790069432514




790069432514



0790069469664



790069469664

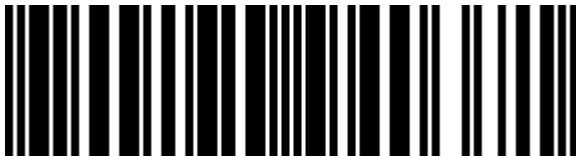

5704174940371

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.