



## Part Index

\*not to scale




- 1 Loosen top guide screws one full turn to allow the top cup to slide freely.




- 2 Connect Ball Adapter (not included) to the back of (A) Dock using (B) Screws and (C) Nuts.

**Do not fully tighten.**

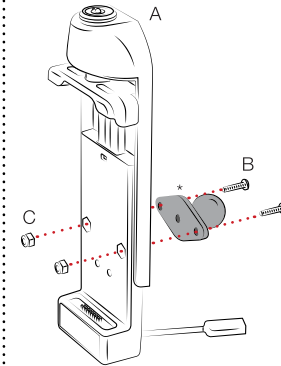


\* Not included

- 3 Insert your phone with IntelliSkin® into (A) Dock with top cup seated comfortably over your phone. Key lock must be in locked position.

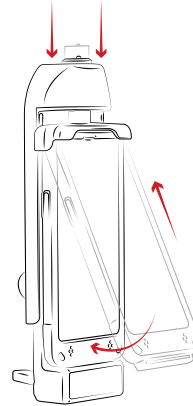

- 4 Slightly shift the top lock approximately 1mm up from the top cup housing. Fully tighten (B) Screws and (C) Nuts from Step 2. Test fitment by unlocking key lock, remove and reinsert phone, and press lock button into lock position. Make any minor adjustments as needed.

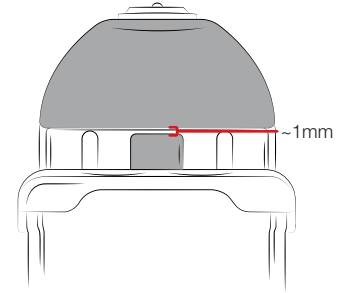

\* To refit this holder for a new phone, simply loosen the Ball Adapter screws and repeat Steps 2 - 4.

**RPR-INS-GDS-DOCK-V3**



## Safety Precaution

Do not install this product near or over an airbag deployment area or in a location that obstructs the driver's vision or interferes with vehicle operation. National Products, Inc does not assume responsibility or liability for any such personal injury, death or property damage.



rammount.com  
1.800.497.7479  
support@rammount.com

# GDS® Locking Vehicle Phone Dock

While RAM® products are designed to function flawlessly, there is always the potential that the product may not function as expected. Most often product issues can be resolved by the customer prior to sending the product in for warranty or replacement. If you experience issues, please follow the guidelines below prior to contacting customer support for assistance.

### Troubleshoot:

(Follow these steps if you encounter any charging issues with your GDS® Dock)

Verify that the dock's power cord is securely plugged into the dock as well as the wall power source.

Assure that the power source is functional by testing with an alternate electronic device.

Verify that the IntelliSkin® connector is securely connected to your device.

After verifying the above steps, see the section below to verify that your dock and IntelliSkin® has been properly cleaned.

### GDS® General Care & Maintenance:

For any accidental spills or accumulated dirt on the pogo pins of the dock, use contact cleaner or alcohol on a cotton swab to gently clean. Clean the contacts on the IntelliSkin®, using contact cleaner or alcohol with a stiff brush.

For industrial and heavy use environments, clean pogo pins and contacts on a regular basis.

### 3 year warranty on all electronic components/Lifetime Warranty on all non-electronic components

The exclusive NPI Lifetime Warranty states that all GDS® non-electronic components and parts are warranted against defect in materials and workmanship for the life of the product or part. NPI's Lifetime Warranty covers the product or its components only. The mount device is not covered under the Lifetime Warranty and will not be replaced if damaged as a result of mount failure. This warranty is expressly limited to persons in the United States, and all foreign countries who purchase GDS® for resale or use in the ordinary course of the buyer's business. This warranty does not cover any product or part that has been abused, worn out, heated, ground or otherwise altered, used for a purchase other than that for which it was intended, or used in a manner inconsistent with any instructions regarding its use.

GDS®, IntelliSkin®, GDS Tech™, GDS Green™ and GDS Compatible™ are trademarks or registered trademarks of National Products Inc. The Distinctive "D" product shape of the GDS® connector is a trademark of National Products Inc. Patents and Trademarks: rammount.com/ip

\*For open cockpit or outdoor use, it is recommended to apply electrical tape to your USB connection.

